



Trend Micro™ TippingPoint™

Threat Protection System (TPS)

MIBs Guide

Actionable threat defense against advanced targeted attacks.

Trend Micro Incorporated reserves the right to make changes to this document and to the product described herein without notice. Before installing and using the product, review the readme files, release notes, and/or the latest version of the applicable documentation, which are available from the Trend Micro website at:

<https://docs.trendmicro.com/en-us/tippingpoint/threat-protection-system.aspx>

Trend Micro, the Trend Micro t-ball logo, TippingPoint, and Digital Vaccine are trademarks or registered trademarks of Trend Micro Incorporated. All other product or company names may be trademarks or registered trademarks of their owners.

Copyright © 2024. Trend Micro Incorporated. All rights reserved.

Document Part No.: TP69851/230927

Release Date: April 2024

Protected by U.S. Patent No.: Pending

This documentation introduces the main features of the product and/or provides installation instructions for a production environment. Read through the documentation before installing or using the product.

Detailed information about how to use specific features within the product may be available at the Trend Micro Online Help Center and/or the Trend Micro Knowledge Base.

Trend Micro always seeks to improve its documentation. If you have questions, comments, or suggestions about this or any Trend Micro document, please contact us at docs@trendmicro.com.

Evaluate this documentation on the following site:

<https://www.trendmicro.com/download/documentation/rating.asp>

Privacy and Personal Data Collection Disclosure

Certain features available in Trend Micro products collect and send feedback regarding product usage and detection information to Trend Micro. Some of this data is considered personal in certain jurisdictions and under certain regulations. If you do not want Trend Micro to collect personal data, you must ensure that you disable the related features.

The following link outlines the types of data that TippingPoint Threat Protection System collects and provides detailed instructions on how to disable the specific features that feedback the information.

<https://success.trendmicro.com/data-collection-disclosure>

Data collected by Trend Micro is subject to the conditions stated in the Trend Micro Privacy Notice:

<https://www.trendmicro.com/privacy>

Table of Contents

Chapter 1: TPS MIBs Guide

Standard SNMP MIBs supported	1-2
SNMPv2-MIB	1-2
IF-MIB	1-3
EtherLike-MIB	1-3
IP-MIB	1-4
SNMP-USER-BASED-SM-MIB	1-4
SNMP-VIEW-BASED-ACM-MIB	1-4
Reference sites for standard MIBs	1-5
TPS-supported MIBs	1-5
TIPPINGPOINT-REG-MIB	1-5
TPT-BAY	1-6
TPT-COMPACT-FLASH-MIB	1-10
TPT-HEALTH-MIB	1-11
Temperature	1-11
Fans	1-13
Voltage	1-14
TPT-HIGH-AVAIL-MIB	1-15
TPT-HOST	1-23
TPT-LICENSE	1-23
TPT-MISC-NOTIFY-MIB	1-24
Common TPT notification objects	1-25
Management TPT notification objects	1-25
Quarantine TPT notification objects	1-25
Congestion notifications	1-26
System Log TPT notification objects	1-28
Audit Log TPT notification objects	1-28
TPT-MULTIDV-MIB	1-32
TPT-NPSTATS-MIB	1-33
Segment port stats	1-39
SSL inspection objects	1-41
TPT-POLICY-MIB	1-42

TPT-PORT-CONFIG-MIB	1-55
TPT-RESOURCE-MIB	1-56
Notifications	1-57
File system	1-59
Memory	1-60
CPU	1-61
Chassis temperature	1-62
Power supply	1-63
System information	1-64
TPT-SFLOW	1-65
TPT-SMSMIBS	1-66
TPT-SMS-TRAP-MIB	1-67
TPT-TPA-HARDWARE-MIB	1-71
Fans	1-71
Power supply	1-74
TPT-TRAFFIC	1-76
Rate limiter	1-76
Rate limit historical seconds	1-77
Rate limit historical minutes	1-78
Rate limit historical hours	1-79
TPT-TPAMIBS-MIB	1-79
TPT-TSE	1-80
Adaptive filter configuration	1-81
Connection blocks table	1-81
Rate limit streams table	1-83
Connection trusts table	1-84

Chapter 2: Using HP Network Node Manager i with MIBs

Loading TippingPoint Enterprise MIBs	2-2
MIB Application Builder	2-2
Discovering the device	2-3
Creating graphs with Application Builder	2-4

Chapter 1

MIB files for the Threat Protection System

A management information base (MIB) is a type of database that enables you to manage devices in a communications network. Database entries are addressed through object identifiers (OIDs). MIB files are descriptions of network objects that can be managed using the Simple Network Management Protocol (SNMP). The format of the MIB is defined as part of the SNMP.

This information includes the following topics:

- *Standard SNMP MIBs supported on page 1-2*
- *TPS-supported MIBs on page 1-5*

Standard SNMP MIBs supported



Important

In a production environment, do not perform excessive SNMP Get requests (or walks) against standard MIBs.

This topic contains the following information:

- [SNMPv2-MIB on page 1-2](#)
- [IF-MIB on page 1-3](#)
- [EtherLike-MIB on page 1-3](#)
- [IP-MIB on page 1-4](#)
- [SNMP-USER-BASED-SM-MIB on page 1-4](#)
- [SNMP-VIEW-BASED-ACM-MIB on page 1-4](#)
- [Reference sites for standard MIBs on page 1-5](#)

SNMPv2-MIB

Defines common information typically provided by managed systems. The Threat Protection System (TPS) supports the following items.

NAME	TYPE	DESCRIPTION
System	Group	A collection of objects common to all managed systems. This includes information such as model, contact and location, up time, services, and system ID.
SNMP	Group	A collection of objects providing information on SNMP protocol stats, such as the number of packets received and transmitted.
coldStart	Notification	Signifies that the TPS device is reinitializing itself, typically a reboot.

IF-MIB

Contains objects for managing and monitoring network interfaces. Only physical interfaces have stats in the following tables. Logical interfaces, such as VLAN and Bridge, are listed, but stats are always 0.

NAME	TYPE	DESCRIPTION
ifTable	Table	List of information and stats for each interface of a system. The number of entries is given by the value of ifNumber.
ifXTable	Table	List of interface entries. The number of entries is given by the value of ifNumber. This table contains additional objects for the interface table.
linkUp	Notification	A linkUp notification signifies that a communication link has left the down state and is now in the up state.
linkDown	Notification	A linkDown notification signifies that a communication link has left the up state and is now in the down state.

EtherLike-MIB

Provides information representing attributes of an interface to an Ethernet-like communications medium.

NAME	TYPE	DESCRIPTION
dot3StatsTable	Table	Contains statistics for a collection of ethernet-like interfaces attached to a particular system.
dot3HCStatsTable	Table	Contains 64-bit versions of error counters from the dot3StatsTable.

IP-MIB

NAME	TYPE	DESCRIPTION
IP	Group	A collection of object stats that include such information as IP datagrams received or transmitted.
ipv4InterfaceTable	Table	Contains per-interface IPv4-specific information.
ipv6InterfaceTable	Table	Contains per-interface IPv6-specific information.
IpSystemStatsTable	Table	Contains system-wide, IP version-specific traffic statistics.
IpAddressTable	Table	Contains addressing information relevant to the entity's interfaces.
ipNetToPhysicalTable	Table	Contains the IP Address Translation table used for mapping from IP addresses to physical addresses.

SNMP-USER-BASED-SM-MIB

Defines the SNMPv3 user-based Security Model (USM). The Threat Protection System (TPS) supports the following groups.

NAME	TYPE	DESCRIPTION
usmStats	Group	A collection of scalar objects that provide information, such as the number of unknown user names, engine IDs, or unsupported security levels.

SNMP-VIEW-BASED-ACM-MIB

This MIB defines the SNMPv3 View-based Access Control Model (VACM) for use in the Simple Network Management Protocol (SNMP) architecture. The Threat Protection System (TPS) supports the following tables.

NAME	TYPE	DESCRIPTION
vacmContextTable	Table	Locally available security contexts
vacmSecurityToGroupTable	Table	Maps a security context with groups
vacmAccessTable	Table	Access rights for groups

NAME	TYPE	DESCRIPTION
vacmViewTreeFamilyTable	Table	Locally held information about families of sub-trees within MIB views

Reference sites for standard MIBs

- IETF: <http://www.ietf.org> – where all the standard RFCs are kept for MIBs
- <http://www.net-snmp.org/docs/mibs/ucdavis.html> – a well maintained site with standard and company specific MIBs

TPS-supported MIBs

The Threat Protection System (TPS) supports these MIBs fully except where noted. These are non-standard MIBs with TPT-specific definitions for Trend Micro™ TippingPoint™ products only.

TIPPINGPOINT-REG-MIB



Note

This MIB file must be loaded before you load any other TippingPoint MIB files.

Defines the object identifier (OID) sub-tree assigned to Trend by the Internet Assigned Numbers Agency (IANA), as well as sub-trees for registered modules, object and event definitions, agent profiles, management application requirements, and experimental definitions.

The following table describes TIPPINGPOINT-REG-MIB sub-trees:

OBJECT	OID	DESCRIPTION
tpt-reg	1.3.6.1.4.1.10734.1	Sub-tree for the registered modules

OBJECT	OID	DESCRIPTION
tpt-generic (not supported)	1.3.6.1.4.1.10734.2	Sub-tree for common object and event definitions
tpt-products	1.3.6.1.4.1.10734.3	Sub-tree for specific object and event definitions
tpt-caps (not supported)	1.3.6.1.4.1.10734.4	Sub-tree for agent profiles
tpt-reqs (not supported)	1.3.6.1.4.1.10734.5	Sub-tree for management application requirements
tpt-expr (not supported)	1.3.6.1.4.1.10734.6	Sub-tree for experimental definitions

TPT-BAY

Used to define the status and configuration of the module slots on NX Series and TX Series devices.

OBJECT	OID	DESCRIPTION
tpt-slot-objs	1.3.6.1.4.1.10734.3.3.2.17	Slot information.
slotTempTable	1.3.6.1.4.1.10734.3.3.2.17.1	A list of the slots on the device.
slotTempEntry	1.3.6.1.4.1.10734.3.3.2.17.1.1	An entry in the slot table. Rows cannot be added or deleted.
slotTempIndex	1.3.6.1.4.1.10734.3.3.2.17.1.1.1	The index number of the slot.
slotName	1.3.6.1.4.1.10734.3.3.2.17.1.1.2	The name of the slot.
slotModuleName	1.3.6.1.4.1.10734.3.3.2.17.1.1.3	String description of the type of module in the slot.

OBJECT	OID	DESCRIPTION
slotStatus	1.3.6.1.4.1.10734.3.3.2.17.1.1.4	The slot status. 0: Empty; no module is currently installed. 1: Active; a module is present in the slot and active. 2: Error. The module might have failed to initialize, or the configured module type might not match the module currently inserted in the slot.
slotModuleSerialNum	1.3.6.1.4.1.10734.3.3.2.17.1.1.5	The serial number of the module currently installed in the slot.

OBJECT	OID	DESCRIPTION
slotModuleType	1.3.6.1.4.1.10734.3.3.2.17.1.1.6	The module type currently installed in the slot. type-12-port-1g-copper(1) type-12-port-1g-sfp(2) type-12-port-25g-sfp(24) type-8-port-10g-sfp(3) type-8-port-100g-qsfp(25) type-8-port-25g-sr-bypass(26) type-8-port-25g-lr-bypass(27) type-2-port-40g-qsfp(4) type-6100(5) type-5100(6) type-2500(7) type-1400(8) type-660(9) type-330(10) type-110(11) type-10(12) type-empty(13) type-8-port-1g-copper-bypass(14) type-4-port-100g-sr4-bypass(28) type-4-port-100g-lr4-bypass(29) type-4-port-1g-sfp-sr-bypass(15) type-4-port-1g-sfp-lr-bypass(16)

OBJECT	OID	DESCRIPTION
		type-4-port-10g-sfp-sr-bypass(17) type-4-port-10g-sfp-lr-bypass(18) type-2-port-40g-qsfp-sr4-bypass(19) type-2-port-40g-qsfp-lr4-bypass(20) type440T(21) type2200T(22) typeVSA(23) type-4-port-40g-sr4-bypass(30) type-4-port-40g-lr4-bypass(31) type-8-port-10g-sr-bypass(32) type-8-port-10g-lr-bypass(33) type-8-port-1g-sx-bypass(34) type-8-port-1g-lx-bypass(35) type-12-port-1g-copper-bypass(36)
tptSlotDeviceID	1.3.6.1.4.1.10734.3.3.3.1.281	The unique identifier of the device that is sending the notification.
tptSlotID	1.3.6.1.4.1.10734.3.3.3.1.282	The index number of the slot that is sending the notification.

OBJECT	OID	DESCRIPTION
tptSlotEvent	1.3.6.1.4.1.10734.3.3.3.1.283	The status of the slot. 0: A module has been removed. 1: A module has been inserted. 2: Error. The module might have failed to initialize, or the configured module type might not match the module currently inserted in the slot.
tptSlotChangeNotify	1.3.6.1.4.1.10734.3.3.3.0.54	A notification of activity on the slot.

TPT-COMPACT-FLASH-MIB

The Threat Protection System (TPS) provides no notification support for this MIB. Defines the status and operating mode of the external storage card.

The following table describes compact flash data objects:

OBJECT	OID	DESCRIPTION
tpt-compact-flash	1.3.6.1.4.1.10734.3.3.2.14	Sub-tree for all external storage card information.
compactFlashPresent	1.3.6.1.4.1.10734.3.3.2.14.1	Indicates card presence. <ul style="list-style-type: none"> • 0: present • 1: absent
compactFlashMounted	1.3.6.1.4.1.10734.3.3.2.14.2	Indicates card mount status. <ul style="list-style-type: none"> • 0: mounted • 1: unmounted
compactFlashFormatted	1.3.6.1.4.1.10734.3.3.2.14.3	Indicates card format status. <ul style="list-style-type: none"> • 0: formatted • 1: unformatted

OBJECT	OID	DESCRIPTION
compactFlashOperationMode	1.3.6.1.4.1.10734.3.3.2.14.4	Indicates card operation mode. <ul style="list-style-type: none"> • 0: secure mode—requires authentication • 1: auto-mount enabled—cards are automatically mounted when inserted
vendorInformation	1.3.6.1.4.1.10734.3.3.2.14.5	Sub-tree of external storage card informational details.
serialNumber	1.3.6.1.4.1.10734.3.3.2.14.5.1	Card serial number.
model	1.3.6.1.4.1.10734.3.3.2.14.5.2	Card model name.
capacity	1.3.6.1.4.1.10734.3.3.2.14.5.3	Card capacity.
revision	1.3.6.1.4.1.10734.3.3.2.14.5.4	Card firmware revision.

The following notifications and SNMP traps apply to changes in the status of the Compact Flash state:

OBJECT	OID	DESCRIPTION
tptCFInsertedNotify	1.3.6.1.4.1.10734.3.3.3.0.51	External storage was inserted on this device.
tptCFEjectedNotify	1.3.6.1.4.1.10734.3.3.3.0.52	External storage was ejected on this device.

TPT-HEALTH-MIB

Indicates the health status of the IPS. Features monitored temperatures, fan speeds, and voltage levels. The Threat Protection System (TPS) provides no health2CTable support.

Temperature

The Temperature objects monitor the device temperature. Alarms are generated when the temperature at a sensor passes a specified threshold.

The following table describes temperature objects:

OBJECT	OID	DESCRIPTION
healthTempTable	1.3.6.1.4.1.10734.3.3.2.13.1	Lists the readings at the device temperature sensors
healthTempEntry	1.3.6.1.4.1.10734.3.3.2.13.1.1	Entry in the temperature table. Rows are predefined and cannot be created or deleted.
healthTempIndex	1.3.6.1.4.1.10734.3.3.2.13.1.1.1	Index number of the entry
healthTempChannel	1.3.6.1.4.1.10734.3.3.2.13.1.1.2	Location of the temperature sensor.
healthTempValue	1.3.6.1.4.1.10734.3.3.2.13.1.1.3	Temperature in degrees centigrade
healthTempSeverity	1.3.6.1.4.1.10734.3.3.2.13.1.1.4	Can be one of the following values: <ul style="list-style-type: none"> • 0: normal • 1: informational note • 2: minor • 3: major • 4: critical
healthTempThresholdType	1.3.6.1.4.1.10734.3.3.2.13.1.1.5	Determines the application of thresholds: <ul style="list-style-type: none"> • 1: minimum; value should not go below threshold • 2: range; value should remain with a designated range • 3: maximum; value should not go above threshold
healthTempMajor	1.3.6.1.4.1.10734.3.3.2.13.1.1.6	Major threshold temperature in degrees centigrade

OBJECT	OID	DESCRIPTION
healthTempCritical	1.3.6.1.4.1.10734.3.3.2.13.1.1.7	Critical threshold temperature in degrees centigrade

Fans

The fan objects monitor the fan performance and health.

The following table describes fan objects:

OBJECT	OID	DESCRIPTION
healthFanTable	1.3.6.1.4.1.10734.3.3.2.13.2	Lists all fans inside the device
healthFanEntry	1.3.6.1.4.1.10734.3.3.2.13.2.1	Entry in the fans table. Rows are predefined and cannot be created or deleted.
healthFanIndex	1.3.6.1.4.1.10734.3.3.2.13.2.1.1	Index number of the entry
healthFanChannel	1.3.6.1.4.1.10734.3.3.2.13.2.1.2	String identifying the fan
healthFanValue	1.3.6.1.4.1.10734.3.3.2.13.2.1.3	Speed of the fan in RPM
healthFanSeverity	1.3.6.1.4.1.10734.3.3.2.13.2.1.4	Can be one of the following values: <ul style="list-style-type: none"> • 0: normal • 1: informational note • 2: minor • 3: major • 4: critical

OBJECT	OID	DESCRIPTION
healthFanThresholdType	1.3.6.1.4.1.10734.3.3.2.13.2.1.5	Determines the application of thresholds: <ul style="list-style-type: none"> • 1: minimum; value should not go below threshold • 2: range; value should remain with a designated range • 3: maximum; value should not go above threshold
healthFanMajor	1.3.6.1.4.1.10734.3.3.2.13.2.1.6	Major threshold speed in RPM
healthFanMinor	1.3.6.1.4.1.10734.3.3.2.13.2.1.7	Critical threshold speed in RPM

Voltage

The voltage objects monitor the voltage levels at various locations within the device.

The following table describes voltage objects:

OBJECT	OID	DESCRIPTION
healthVoltageTable	1.3.6.1.4.1.10734.3.3.2.13.3	List of all voltages at various locations inside the device
healthVoltageEntry	1.3.6.1.4.1.10734.3.3.2.13.3.1	An entry in the voltage table. Rows are predefined and cannot be created or deleted.
healthVoltageIndex	1.3.6.1.4.1.10734.3.3.2.13.3.1.1	Index number of the entry
healthVoltageChannel	1.3.6.1.4.1.10734.3.3.2.13.3.1.2	Location of the voltage sensor
healthVoltageValue	1.3.6.1.4.1.10734.3.3.2.13.3.1.3	Voltage reading in millivolts

OBJECT	OID	DESCRIPTION
healthVoltageSeverity	1.3.6.1.4.1.10734.3.3.2.13.3.1.4	Can be one of the following values: <ul style="list-style-type: none"> • 0: normal • 1: informational note • 2: minor • 3: major • 4: critical
healthVoltageThresholdType	1.3.6.1.4.1.10734.3.3.2.13.3.1.5	Determines the application of thresholds: <ul style="list-style-type: none"> • 1: minimum; value should not go below threshold • 2: range; value should remain with a designated range • 3: maximum; value should not go above threshold
healthVoltageMajor	1.3.6.1.4.1.10734.3.3.2.13.3.1.6	Major threshold delta above or below the nominal voltage value, in millivolts
healthVoltageMinor	1.3.6.1.4.1.10734.3.3.2.13.3.1.7	Critical threshold delta above or below the nominal voltage value, in millivolts
healthVoltageNominal	1.3.6.1.4.1.10734.3.3.2.13.3.1.8	Optimal voltage value at this sensor location

TPT-HIGH-AVAIL-MIB

Defines the conditions and actions for Intrinsic Network HA, Transparent Network HA, and Zero-Power HA, and also offers information about the current fault state of the device.

OBJECT	OID	DESCRIPTION
highAvailTimeStamp	1.3.6.1.4.1.10734.3.3.2.6.1	The last transition of the fault state in seconds since January 1, 1970. The value is zero if the fault state has not changed since the last reboot.
highAvailFaultState	1.3.6.1.4.1.10734.3.3.2.6.2	The current fault state of the device: <ul style="list-style-type: none">• 0: normal• 1: fallback
highAvailFaultCause	1.3.6.1.4.1.10734.3.3.2.6.3	The reason for the current fault state: <ul style="list-style-type: none">• 0: none• 1: suspended task• 2: out of memory• 3: hardware breaking point• 4: TSE failure• 5: watchdog timeout• 6: user reset• 7: user-initiated fallback• 8: threshold failure• 9: software watchdog timeout• 10: OAM fault• 11: hard disk disabled
highAvailThresholdEnabled	1.3.6.1.4.1.10734.3.3.2.6.4	The current Layer-2 Fallback (L2FB) threshold-enabled setting for the device.

OBJECT	OID	DESCRIPTION
highAvailThresholdPercent	1.3.6.1.4.1.10734.3.3.2.6.5	If the fallback threshold is enabled, the percent packet loss at which the device is configured to enter L2FB.
highAvailEnabled	1.3.6.1.4.1.10734.3.3.2.6.6	Indicates whether intrinsic network HA has been enabled.
highAvailTransparentState	1.3.6.1.4.1.10734.3.3.2.6.7	State of the connection to the device's transparent HA partner: <ul style="list-style-type: none"> • 0: not connected • 1: unresponsive • 2: connected
highAvailTransparentEnabled	1.3.6.1.4.1.10734.3.3.2.6.8	Indicates whether transparent HA has been enabled.
highAvailTransparentPartner	1.3.6.1.4.1.10734.3.3.2.6.9	Network address or serial number of the device's transparent HA partner.
highAvailZeroPowerState	1.3.6.1.4.1.10734.3.3.2.6.10	The current ZPHA state.
highAvailZeroPowerQuantity	1.3.6.1.4.1.10734.3.3.2.6.11	The number of segments with ZPHA modules.
highAvailZeroPowerTable	1.3.6.1.4.1.10734.3.3.2.6.12	Table of segments with ZPHA modules.
highAvailZeroPowerEntry	1.3.6.1.4.1.10734.3.3.2.6.12.1	An entry in the ZPHA table.
highAvailZeroPowerIndex	1.3.6.1.4.1.10734.3.3.2.6.12.1.1	The index number of the entry.
highAvailZeroPowerSegment	1.3.6.1.4.1.10734.3.3.2.6.12.1.2	The name of the segment on which ZPHA is enabled. For TPS devices, this name will always be Segment ALL.

OBJECT	OID	DESCRIPTION
highAvailZeroPowerActive	1.3.6.1.4.1.10734.3.3.2.6.12.1.3	The current ZPHA state of the segment: <ul style="list-style-type: none"> • 0: normal, ZPHA inactive • 1: TPS bypass, ZPHA active TPS devices return a separate value for each bypass I/O module: <ul style="list-style-type: none"> • 0 • 1
highAvailZeroPowerAction	1.3.6.1.4.1.10734.3.3.2.6.12.1.4	The action taken when ZPHA is active. For TPS devices, this mode will always be 1: bypass.
highAvailZeroPowerMode	1.3.6.1.4.1.10734.3.3.2.6.12.1.5	The fiber mode of this ZPHA. For TPS devices, this mode will always be 0: unknown.
highAvailZeroPowerPresence	1.3.6.1.4.1.10734.3.3.2.6.13	Indicates ZPHA presence: <ul style="list-style-type: none"> • 0: present • 1: absent

The following notifications and SNMP traps apply to Intrinsic Network HA.

OBJECT	OID	DESCRIPTION
tptlhaNotify	1.3.6.1.4.1.10734.3.3.3.0.15	<p>The notification object that informs the management station of changes in the Intrinsic HA state of the device.</p> <p>Triggered when the device enters or exits L2FB. Possible causes:</p> <ul style="list-style-type: none"> • Depleted memory. • User reset – Manually clearing L2FB. • User fallback – Manually entering L2FB. • Threshold failure – Performance protection triggers L2FB. • Process error – Crash of a vital process. • Watchdog timeout – Failure of process monitoring.
tptlhaNotifyDeviceID	1.3.6.1.4.1.10734.3.3.3.1.81	The unique identifier of the device sending the notification.
tptlhaNotifyTimeStamp	1.3.6.1.4.1.10734.3.3.3.1.82	The timestamp of the notification in seconds since January 1, 1970.
tptlhaNotifyFaultState	1.3.6.1.4.1.10734.3.3.3.1.83	<p>The current fault state of the device:</p> <ul style="list-style-type: none"> • 0: normal • 1: fallback

OBJECT	OID	DESCRIPTION
tptlhaNotifyFaultCause	1.3.6.1.4.1.10734.3.3.3.1.84	<p>The reason for the current fault state:</p> <ul style="list-style-type: none"> • out-of-memory • user-reset (user manually clears L2FB) • user-fallback (user manually enters L2FB) • threshold failure (L2FB triggered by performance protection) • process error (crash of vital process) • software watchdog timeout (failure of process monitoring)

The following notifications and SNMP traps apply to Transparent Network HA.

OBJECT	OID	DESCRIPTION
tptTrhaNotify	1.3.6.1.4.1.10734.3.3.3.0.18	<p>The notification object that informs the management station of changes in the transparent HA state of the device.</p> <p>Triggered when the HA partner is connected or not-connected (including unresponsive).</p>
tptTrhaNotifyDeviceID	1.3.6.1.4.1.10734.3.3.3.1.86	The unique identifier of the device sending the notification.

OBJECT	OID	DESCRIPTION
tptTrhaNotifyTimeStamp	1.3.6.1.4.1.10734.3.3.3.1.87	The timestamp of the notification in seconds since January 1, 1970.
tptTrhaNotifyNewState	1.3.6.1.4.1.10734.3.3.3.1.88	State of the connection to the device's transparent HA partner: <ul style="list-style-type: none"> • not connected • connected

The following notifications and SNMP traps apply to Zero-Power HA (ZPHA).

OBJECT	OID	DESCRIPTION
tptZphaNotify	1.3.6.1.4.1.10734.3.3.3.0.24	The notification object that informs the management station of changes in the ZPHA state of the device.
tptZphaNotifyDeviceID	1.3.6.1.4.1.10734.3.3.3.1.161	The unique identifier of the device sending the notification.
tptZphaNotifyTimeStamp	1.3.6.1.4.1.10734.3.3.3.1.162	The timestamp of the notification in seconds since January 1, 1970.
tptZphaNotifySegmentName	1.3.6.1.4.1.10734.3.3.3.1.163	The name of the segment on which ZPHA is enabled.
tptZphaNotifyNewState	1.3.6.1.4.1.10734.3.3.3.1.164	The current ZPHA state of the segment: <ul style="list-style-type: none"> • 0: normal, ZPHA inactive • 1: IPS bypass, ZPHA active

The following notifications and SNMP traps apply to changes in the Performance Protection state.

OBJECT	OID	DESCRIPTION
tptPerfProtNotify	1.3.6.1.4.1.10734.3.3.3.0.21	Triggered when performance protection is triggered by engine or NIC congestion.
tptPerfProtNotifyDeviceID	1.3.6.1.4.1.10734.3.3.3.1.141	The unique identifier of the device sending the notification.
tptPerfProtNotifyTimeStamp	1.3.6.1.4.1.10734.3.3.3.1.142	The timestamp of the notification in seconds since January 1, 1970.
tptPerfProtNotifyPhase	1.3.6.1.4.1.10734.3.3.3.1.143	Indicates the current performance protection mode: <ul style="list-style-type: none"> • 1: entering • 2: continuing • 3: exiting
tptPerfProtNotifyPacketLoss	1.3.6.1.4.1.10734.3.3.3.1.144	The current packet loss rate per thousand. When exiting performance protection mode, the value will always be 0 (zero).
tptPerfProtNotifyLossThreshold	1.3.6.1.4.1.10734.3.3.3.1.145	The current packet loss threshold per thousand.
tptPerfProtNotifyDuration	1.3.6.1.4.1.10734.3.3.3.1.146	The number of seconds that performance protection will be active.
tptPerfProtNotifyMissedAlerts	1.3.6.1.4.1.10734.3.3.3.1.147	The number of alerts missed during the performance protection period. When exiting performance protection mode, the value will always be 0 (zero).

TPT-HOST

Defines the IPS host information, the default gateway address, and indicates whether the device is currently configured for service access.

OBJECT	OID	DESCRIPTION
hostIPv4Gateway	1.3.6.1.4.1.10734.3.3.2.12.2	The IPv4 default gateway.
hostIPv6Gateway	1.3.6.1.4.1.10734.3.3.2.12.3	The IPv6 default gateway. <ul style="list-style-type: none"> • 0: disabled • 1: enabled
hostIPv6Enabled	1.3.6.1.4.1.10734.3.3.2.12.4	Indicates whether IPv6 is enabled on the device. <ul style="list-style-type: none"> • 0: disabled • 1: enabled
hostSSLCert	1.3.6.1.4.1.10734.3.3.2.12.8	The currently active SSL cert. <ul style="list-style-type: none"> • 0: none • 1: temporary • 2: authorized
hostInitState	1.3.6.1.4.1.10734.3.3.2.12.9	The current host initialization state. <ul style="list-style-type: none"> • 0: in progress • 1: complete

TPT-LICENSE

Support for TippingPoint license packages, including TOS, Digital Vaccine, Reputation DV, and other services.

OBJECT	OID	DESCRIPTION
licenseTable	1.3.6.1.4.1.10734.3.3.2.15.1	Table of licensed features.

OBJECT	OID	DESCRIPTION
licenseEntry	1.3.6.1.4.1.10734.3.3.2.15.1.1	An entry in the licensed features table. Rows cannot be added or deleted.
licenseEntryIndex	1.3.6.1.4.1.10734.3.3.2.15.1.1.1	The index number of the entry.
licenseEntryFeature	1.3.6.1.4.1.10734.3.3.2.15.1.1.2	The name of the licensed feature.
licenseEntryStatus	1.3.6.1.4.1.10734.3.3.2.15.1.1.3	Status of the licensed feature: <ul style="list-style-type: none"> • 0: informational message • 1: license valid • 2: warning • 3: error
licenseEntryAction	1.3.6.1.4.1.10734.3.3.2.15.1.1.4	Action to take for the licensed feature. <ul style="list-style-type: none"> • 0: allow • 1: deny
licenseEntryExpiry	1.3.6.1.4.1.10734.3.3.2.15.1.1.5	The date on which this licensed feature will expire.
licenseEntryDetails	1.3.6.1.4.1.10734.3.3.2.15.1.1.6	Any additional information about this licensed feature.

TPT-MISC-NOTIFY-MIB

Notifications for logs and other features.



Note

The MIB file includes references to Network Discovery Scan.

This object applies to all notifications.

Common TPT notification objects

The following table describes general notification objects:

OBJECT	OID	DESCRIPTION
tptMiscNotifyDeviceID	1.3.6.1.4.1.10734.3.3.3.1.31	The unique identifier of the device sending the notification. This is the first payload parameter for all notifications in the TPT-MISC-NOTIFY module.

Management TPT notification objects

The following table describes management notification objects. These notifications communicate with the management station:

OBJECT	OID	DESCRIPTION
tptManagedNotify	1.3.6.1.4.1.10734.3.3.3.0.9	Informs the management station that the device is now being managed by that station
tptUnmanagedNotify	1.3.6.1.4.1.10734.3.3.3.0.10	Informs the management station that the device is no longer being managed by that station

Quarantine TPT notification objects

The following notifications are generated by quarantine actions:

OBJECT	OID	DESCRIPTION
tptQuarantineNotify	1.3.6.1.4.1.10734.3.3.3.0.20	The notification that indicates that a host has been added to or removed from the quarantine list.
tptQuarantineNotifyNetAddr	1.3.6.1.4.1.10734.3.3.3.1.132	The network address of the host being quarantined or removed from the quarantine list.

OBJECT	OID	DESCRIPTION
tptQuarantineNotifyHostNetAddrV6	1.3.6.1.4.1.10734.3.3.3.1.133	The IPv6 network address of the host.
tptQuarantineNotifyReason	1.3.6.1.4.1.10734.3.3.3.1.134	The reason that the host was quarantined. The parameter is undefined if the host was removed.
tptQuarantineNotifySegmentName	1.3.6.1.4.1.10734.3.3.3.1.135	The segment related to the quarantine or removal from the quarantine list.
tptQuarantineNotifyAction	1.3.6.1.4.1.10734.3.3.3.1.136	Whether the host was added to or removed from the quarantine list. <ul style="list-style-type: none"> • 1: add • 2: remove
tptQuarantineNotifySslInspected	1.3.6.1.4.1.10734.3.3.3.1.181	Flag indicating if this quarantine action was performed on an inspected SSL data stream. <ul style="list-style-type: none"> • 1: Yes • 2: No

Congestion notifications

The following notifications and SNMP traps are generated when congestion thresholds are met.

OBJECT	OID	DESCRIPTION
tptCongestionPacketLoss	1.3.6.1.4.1.10734.3.3.3.1.153	The current packet-loss rate per thousand.

OBJECT	OID	DESCRIPTION
tptCongestionNotifyPhase	1.3.6.1.4.1.10734.3.3.3.1.154	<p>Indicates whether the device is entering, continuing, or exiting congestion threshold mode.</p> <ul style="list-style-type: none"> • 1: entering • 2: continuing • 3: exiting
tptCongestionThreshold	1.3.6.1.4.1.10734.3.3.3.1.155	The current packet-loss threshold per thousand.
tptTier3CongestionPacketLoss	1.3.6.1.4.1.10734.3.3.3.1.156	The current Tier 3 packet-loss rate per thousand.
tptTier3CongestionNotifyPhase	1.3.6.1.4.1.10734.3.3.3.1.157	Indicates whether the device is entering, continuing, or exiting Tier 3 congestion threshold mode.
tptTier3CongestionThreshold	1.3.6.1.4.1.10734.3.3.3.1.158	The current Tier 3 packet-loss threshold per thousand.
tptCongestionThresholdNotify	1.3.6.1.4.1.10734.3.3.3.0.25	The notification that the device-wide congestion has reached the configured congestion threshold. Triggered only by engine congestion, not NIC congestion.
tptiTier3CongestionNotify	1.3.6.1.4.1.10734.3.3.3.0.26	The notification that the Tier 3 congestion has reached the configured congestion threshold. Triggered only by engine congestion, not NIC congestion.

System Log TPT notification objects

The following notifications are generated when a critical message, error message, or warning is logged in the system log:



Note

These objects are deprecated.

OBJECT	OID	DESCRIPTION
tptSystemLogNotify	1.3.6.1.4.1.10734.3.3.3.0.16	The notification that a critical message, error message, or warning has been logged.
tptSystemLogNotifyText	1.3.6.1.4.1.10734.3.3.3.1.92	The text of the message being logged.
tptSystemLogNotifySequence	1.3.6.1.4.1.10734.3.3.3.1.93	The log file entry sequence number corresponding to this notification. This value will always be 0 (zero).
tptSystemLogNotifySeverity	1.3.6.1.4.1.10734.3.3.3.1.94	The severity of the attack: <ul style="list-style-type: none"> • 1: critical • 2: error • 4: warning
tptSystemLogNotifyTimeSec	1.3.6.1.4.1.10734.3.3.3.1.95	The time that this message was logged, in seconds since January 1, 1970.
tptSystemLogNotifyTimeNano	1.3.6.1.4.1.10734.3.3.3.1.96	The nanoseconds portion of tptSystemLogNotifyTimeSec.

Audit Log TPT notification objects

The following notifications are generated when a message or warning is logged in the audit log:

**Note**

These objects are deprecated.

OBJECT	OID	DESCRIPTION
tptAuditLogCapacityNotifyPercent	1.3.6.1.4.1.10734.3.3.3.1.201	The percentage of the audit log data threshold.
tptAuditLogCapacityOrFailureNotifyTime	1.3.6.1.4.1.10734.3.3.3.1.202	The time of the data capacity threshold notification.
tptAuditLogNotify	1.3.6.1.4.1.10734.3.3.3.0.60	Audit log notification uses the following fields: <ul style="list-style-type: none"> • tptMiscNotifyDeviceID • tptAuditLogNotifyTime • tptAuditLogNotifyAccess • tptAuditLogNotifyType • tptAuditLogNotifyIpAddrType • tptAuditLogNotifyIpAddr • tptAuditLogNotifyCategory • tptAuditLogNotifyResult • tptAuditLogNotifyUser • tptAuditLogNotifyMessage
tptAuditLogNotifyTime	1.3.6.1.4.1.10734.3.3.3.1.170	The date and time when the entry was logged.

OBJECT	OID	DESCRIPTION
tptAuditLogNotifyAccess	1.3.6.1.4.1.10734.3.3.3.1.171	The access level of the user initiating the audit check and generating the log. This is a bit field with the following mapping: <ul style="list-style-type: none">• 0x0 – normal• 0x1 – operator• 0x4 – administrator• 0x8 – super-user
tptAuditLogNotifyType	1.3.6.1.4.1.10734.3.3.3.1.172	Interface source of the audit log action.
tptAuditLogNotifyIpAddrType	1.3.6.1.4.1.10734.3.3.3.1.173	Type of IP address from which the user connected.
tptAuditLogNotifyIpAddr	1.3.6.1.4.1.10734.3.3.3.1.174	IP address from which the user connected

OBJECT	OID	DESCRIPTION
tptAuditLogNotifyCategory	1.3.6.1.4.1.10734.3.3.3.1.175	Functional area where the audit log was generated: 1: undefined 2: general 3: login 4: logout 5: user 6: time 7: policy 8: update 9: boot 10: report 11: host 12: cfg 13: device 14: sms 15: server 16: segment 17: license 18: ha 19: monitor 20: ipFilter 21: connTable 22: hostComm 23: tse 24: cf

OBJECT	OID	DESCRIPTION
tptAuditLogNotifyResult	1.3.6.1.4.1.10734.3.3.3.1.176	The result, pass or fail, of an audit check: 1: success 2: failed
tptAuditLogNotifyUser	1.3.6.1.4.1.10734.3.3.3.1.177	The user initiating the audit check and generating the log.
tptAuditLogNotifyMessage	1.3.6.1.4.1.10734.3.3.3.1.178	A description of what configuration change was attempted (and possibly succeeded) by the user.

TPT-MULTIDV-MIB

Manages the Multiple Digital Vaccine feature. This feature allows the IPS to manage multiple types of Digital Vaccine packages, if they are currently available from Trend.

OBJECT	OID	DESCRIPTION
installedDVTable	1.3.6.1.4.1.10734.3.3.2.1.10.2.1	Table of installed Digital Vaccine (DV) packages.
installedDVEntry	1.3.6.1.4.1.10734.3.3.2.1.10.2.1.1	An entry in the Installed DV table. Rows cannot be added or removed.
installedDVIndex	1.3.6.1.4.1.10734.3.3.2.1.10.2.1.1.1.1	Index of the DVs installed.
installedDVVersion	1.3.6.1.4.1.10734.3.3.2.1.10.2.1.1.2.1	The version number of the DV on this machine.
installedDVIsActive	1.3.6.1.4.1.10734.3.3.2.1.10.2.1.1.3.1	The active state of the DV.

Auxiliary DV objects

OBJECT	OID	DESCRIPTION
auxiliaryDVTable	1.3.6.1.4.1.10734.3.3.2.1.10.2.2	Table of auxiliary Digital Vaccine (DV) packages.
auxiliaryDVEntry	1.3.6.1.4.1.10734.3.3.2.1.10.2.2.1	An entry in the Auxiliary DV table. Rows cannot be added or removed.
auxiliaryDVIndex	1.3.6.1.4.1.10734.3.3.2.1.10.2.2.1.1	The index number of the entry.
auxiliaryDVType	1.3.6.1.4.1.10734.3.3.2.1.10.2.2.1.2	The type of the auxiliary DV.
auxiliaryDVName	1.3.6.1.4.1.10734.3.3.2.1.10.2.2.1.3	The name of the auxiliary DV.
auxiliaryDVVersion	1.3.6.1.4.1.10734.3.3.2.1.10.2.2.1.4	The auxiliary DV version number.
auxiliaryDVPackage	1.3.6.1.4.1.10734.3.3.2.1.10.2.2.1.5	The auxiliary DV version in string format: major.minor.patch.build

TPT-NPSTATS-MIB

Information about network processor statistics.

The following objects apply to the NP tier statistics.

OBJECT	OID	DESCRIPTION
npstatsTiersTable	1.3.6.1.4.1.10734.3.3.2.10.2	A table of network processor statistics, sorted by tier.
npstatsTiersEntry	1.3.6.1.4.1.10734.3.3.2.10.2.1	An entry in the network processor statistics tiers table.
npstatsTierNumber	1.3.6.1.4.1.10734.3.3.2.10.2.1.1	The tier number.

OBJECT	OID	DESCRIPTION
npstatsTiersReceiveMbps	1.3.6.1.4.1.10734.3.3.2.10.2.1.2	The current receive rate on the tier in Mbps.
npstatsTiersTransmitMbps	1.3.6.1.4.1.10734.3.3.2.10.2.1.3	The current transmit rate on the tier in Mbps.
npstatsTiersRxPktsPerSec	1.3.6.1.4.1.10734.3.3.2.10.2.1.4	The current receive rate in packets per second.
npstatsTiersMaxPktsPerSec	1.3.6.1.4.1.10734.3.3.2.10.2.1.5	The maximum receive rate in packets per second.
npstatsTiersAvgBytesPerPkt	1.3.6.1.4.1.10734.3.3.2.10.2.1.6	The average packet size in bytes.
npstatsTiersUtilizationPercent	1.3.6.1.4.1.10734.3.3.2.10.2.1.7	The percent utilization of this tier.
npstatsTier1UtilizationPercent	1.3.6.1.4.1.10734.3.3.2.10.2.1.7.1	Utilization ratio of total traffic against the licensed throughput of the device for Tier-1.
npstatsTier2UtilizationPercent	1.3.6.1.4.1.10734.3.3.2.10.2.1.7.2	Utilization ratio of total traffic against the licensed throughput of the device for Tier-2.
npstatsTier3UtilizationPercent	1.3.6.1.4.1.10734.3.3.2.10.2.1.7.3	Utilization ratio of total traffic against the licensed throughput of the device for Tier-3.
npstatsTier4UtilizationPercent	1.3.6.1.4.1.10734.3.3.2.10.2.1.7.4	Utilization ratio of total traffic against the licensed throughput of the device for Tier-4.
npstatsTiersRatioToNextPer10K	1.3.6.1.4.1.10734.3.3.2.10.2.1.8	The ratio of this tier's throughput to the next per 10,000.

OBJECT	OID	DESCRIPTION
npstatsTiersMaxReceiveMbps	1.3.6.1.4.1.10734.3.3.2.10.2.1.9	The maximum receive rate in Mbps.
npstatsTiersMaxTransmitMbps	1.3.6.1.4.1.10734.3.3.2.10.2.1.10	The maximum transmit rate in Mbps.
npstatsTiersMaxUtilizationPercent	1.3.6.1.4.1.10734.3.3.2.10.2.1.2.11	The maximum percent utilization of this tier.
npstatsTierMaxRatioToNextPer10K	1.3.6.1.4.1.10734.3.3.2.10.2.1.2.12	The max ratio of this tier's throughput to the next per 10K.

The following objects apply to other NP statistics.

OBJECT	OID	DESCRIPTION
npstatsTiersExtra	1.3.6.1.4.1.10734.3.3.2.10.3	A list of additional network processor statistics information.
npstatsTier1BypassMbps	1.3.6.1.4.1.10734.3.3.2.10.3.1	The current bypass rate in Mbps.
npstatsTier1Balance	1.3.6.1.4.1.10734.3.3.2.10.3.2	The load balance across network processors. A value of 1000 is exactly balanced, and 0 indicates all traffic is being handled on one processor. For TPS devices, this value is always 0 (zero).
npstatsTier1MaxPktsPerSecA	1.3.6.1.4.1.10734.3.3.2.10.3.3	The maximum processor A receive rate in packets per second.
npstatsTier1MaxPktsPerSecB	1.3.6.1.4.1.10734.3.3.2.10.3.4	The maximum processor B receive rate in packets per second. For TPS devices, this value is always 0 (zero).

OBJECT	OID	DESCRIPTION
npstatsTier1TxPktsPerSec	1.3.6.1.4.1.10734.3.3.2.10.3.8	The transmit rate in packets per second.
npstatsTier1MaxTxPktsPerSec	1.3.6.1.4.1.10734.3.3.2.10.3.9	The maximum transmit rate in packets per second.
npstatsTier4TriggerMatchPer1000	1.3.6.1.4.1.10734.3.3.2.10.3.5	Proportion of traffic inspected because of a trigger match (percent value times 100).
npstatsTier4ReroutePer1000	1.3.6.1.4.1.10734.3.3.2.10.3.6	Proportion of traffic inspected because of a reroute (percent value times 100).
npstatsTier4ProtoDcdPer1000	1.3.6.1.4.1.10734.3.3.2.10.3.11	Percentage of reroute packets that are sent to TCP reassembly when additional analysis is required of a protocol. Protocols that need further analysis include FTP commands, Telnet, HTTP encoded frames, Microsoft SMB frames, and Microsoft RPC frames.
npstatsTier4TcpSequencePer1000	1.3.6.1.4.1.10734.3.3.2.10.3.7	Proportion of traffic inspected because of TCP sequence (percent value times 100).
npstatsTier1MaxPktsPerSecC	1.3.6.1.4.1.10734.3.3.2.10.3.10	The maximum receive rate for processor C in packets per second. For TPS devices, this value is always 0 (zero).
npstatsTier1PatternMatchToRxPktsPerSecRatio	1.3.6.1.4.1.10734.3.3.2.10.3.21	The ratio of this tier's pattern match packets per second to RX packets per second.

OBJECT	OID	DESCRIPTION
npstatsTier1MaxPatternMatchToRxPktsPerSecRatio	1.3.6.1.4.1.10734.3.3.2.10.3.22	The maximum ratio of this tier's pattern match packets per second to RX packets per second.
npstatsTier2MaxTxTrustedPktsPerSec	1.3.6.1.4.1.10734.3.3.2.10.3.23	The maximum Tier 2 Trusted packets transmit rate in packets per second.
npstatsTier3MaxTxTrustedPktsPerSec	1.3.6.1.4.1.10734.3.3.2.10.3.24	The maximum Tier 3 Trusted packets transmit rate in packets per second.
npstatsTier4MaxTxTrustedPktsPerSec	1.3.6.1.4.1.10734.3.3.2.10.3.25	The maximum Tier 4 Trusted packets transmit rate in packets per second.
npstatsTier4MaxTriggerMatchPer1000	1.3.6.1.4.1.10734.3.3.2.10.3.26	Maximum proportion of traffic inspected because of trigger match (percent value times 100).
npstatsTier4MaxReroutePer1000	1.3.6.1.4.1.10734.3.3.2.10.3.27	Maximum proportion of traffic inspected because of reroute (percent value times 100).
npstatsTier4MaxTcpSequencePer1000	1.3.6.1.4.1.10734.3.3.2.10.3.28	Maximum proportion of traffic inspected because of TCP sequence (percent value times 100).
npstatsTier4MaxProtoDcdPer1000	1.3.6.1.4.1.10734.3.3.2.10.3.29	Maximum proportion of reroute traffic inspected because of protocol decode (percent value times 100).
npstatsMisc	1.3.6.1.4.1.10734.3.3.2.10.4	Miscellaneous network processor statistical information.

OBJECT	OID	DESCRIPTION
npstatsMiscTxPktsBestEffort	1.3.6.1.4.1.10734.3.3.2.10.4.1	The number of packets per second transmitted because of best effort mode.
npstatsMiscThroughputCurrent	1.3.6.1.4.1.10734.3.3.2.10.4.2	Current throughput in Kbps.
npstatsMiscThroughputPercent	1.3.6.1.4.1.10734.3.3.2.10.4.3	Current percentage of licensed throughput.
npstatsMiscThroughputLicensed	1.3.6.1.4.1.10734.3.3.2.10.4.4	Licensed throughput in Kbps.
npstatsMiscThroughputHighWaterMark	1.3.6.1.4.1.10734.3.3.2.10.4.5	The highest throughput level reached since the last clear or reboot in Kbps.
npstatsMiscThroughputHighWaterMarkPercent	1.3.6.1.4.1.10734.3.3.2.10.4.6	The maximum seen percentage of the licensed throughput since the last clear or reboot.
npstatsMiscThroughputNotifyDeviceID	1.3.6.1.4.1.10734.3.3.3.1.361	The unique identifier of the device sending this notification.
npstatsMiscThroughputNotifyTimeStamp	1.3.6.1.4.1.10734.3.3.3.1.362	The time of this notification (in seconds since January 1, 1970).
npstatsMiscThroughputNotifyState	1.3.6.1.4.1.10734.3.3.3.1.363	The Throughput Utilization state on the device.
npstatsMiscThroughputNotifyTransition	1.3.6.1.4.1.10734.3.3.3.1.364	The Throughput Utilization state transition on the device.
npstatsMiscThroughputNotifyCurrent	1.3.6.1.4.1.10734.3.3.3.1.365	The current Throughput Utilization in Kbps.

OBJECT	OID	DESCRIPTION
npstatsMiscThroughputNotify	1.3.6.1.4.1.10734.3.3.3.0.80	Notification used to inform the management station of changes in the Throughput Utilization state on the device.

Segment port stats

Statistical information pertaining to network segments for a stack configuration.

OBJECT	OID	DESCRIPTION
npstatsStackSegmentReceiveMbps	1.3.6.1.4.1.10734.3.3.2.10.1 0.1	Aggregate Rx rate in Mbps from all network segments.
npstatsStackSegmentMaxReceiveMbps	1.3.6.1.4.1.10734.3.3.2.10.1 0.2	Maximum Rx rate in Mbps from all network segments.
npstatsStackSegmentTransmitMbps	1.3.6.1.4.1.10734.3.3.2.10.1 0.3	Aggregate Tx rate in Mbps to all network segments.
npstatsStackSegmentMaxTransmitMbps	1.3.6.1.4.1.10734.3.3.2.10.1 0.4	Maximum Tx rate in Mbps to all network segments.
npstatsStackBalance	1.3.6.1.4.1.10734.3.3.2.10.1 0.5	The load balance percent across all stack members.
npstatsStackMinBalance	1.3.6.1.4.1.10734.3.3.2.10.1 0.6	The minimum, non-zero load balance percent across all stack members.
npstatsStackSegmentRatioToTier1Per10K	1.3.6.1.4.1.10734.3.3.2.10.1 0.7	The ratio of this tier's throughput to tier 1 per 10,000 (percent value times 100).

OBJECT	OID	DESCRIPTION
npstatsStackSegmentMaxRatioToTier1Per10K	1.3.6.1.4.1.10734.3.3.2.10.10.8	The maximum ratio of this tier's throughput to tier 1 per 10,000 (percent value times 100).

Stack member table

Statistical information related to network segments for each stack member.

OBJECT	OID	DESCRIPTION
npstatsStackMemberKey	1.3.6.1.4.1.10734.3.3.2.10.10.9.1.2	Unique stack member identifier.
npstatsStackMemberHostname	1.3.6.1.4.1.10734.3.3.2.10.10.9.1.3	The stack member host name.
npstatsStackMemberSegmentReceiveMbps	1.3.6.1.4.1.10734.3.3.2.10.10.9.1.4	The current segment Rx rate in Mbps for a stack member.
npstatsStackMemberMaxSegmentReceiveMbps	1.3.6.1.4.1.10734.3.3.2.10.10.9.1.5	The maximum segment Rx rate in Mbps for a stack member.

Stacking port stats

Statistical information pertaining to stacking ports in a stack configuration.

OBJECT	OID	DESCRIPTION
npstatsStackPortsReceiveMbps	1.3.6.1.4.1.10734.3.3.2.10.11.1	Aggregate Rx rate in Mbps from all stacking ports.
npstatsStackPortsMaxReceiveMbps	1.3.6.1.4.1.10734.3.3.2.10.11.2	Maximum Rx rate in Mbps from all stacking ports.
npstatsStackPortsTransmitMbps	1.3.6.1.4.1.10734.3.3.2.10.11.3	Aggregate Tx rate in Mbps for all stacking ports.

OBJECT	OID	DESCRIPTION
npstatsStackPortsMaxTransmitMbps	1.3.6.1.4.1.10734.3.3.2.10.11.4	Maximum Tx rate in Mbps for all stacking ports.
npstatsStackRxToStackTxMbps	1.3.6.1.4.1.10734.3.3.2.10.11.5	Aggregate through traffic rate from segment ports to stacking ports.
npstatsStackMaxRxToStackTxMbps	1.3.6.1.4.1.10734.3.3.2.10.11.6	The maximum through traffic rate from segment ports to stacking ports.
npstatsStackRxToSegmentTxMbps	1.3.6.1.4.1.10734.3.3.2.10.11.7	Return rate in Mbps for traffic coming in on the stacking ports and transmitted to the segment ports.
npstatsStackMaxRxToSegmentTxMbps	1.3.6.1.4.1.10734.3.3.2.10.11.8	Maximum return rate in Mbps for traffic coming in on the stacking ports and transmitted to the segment ports.
npstatsStackRatioToTier1Per10K	1.3.6.1.4.1.10734.3.3.2.10.11.9	Percent of traffic being inspected by this device as a ratio of the stack Rx traffic to tier 1 per 10,000 (percent value times 100).
npstatsStackMaxRatioToTier1Per10K	1.3.6.1.4.1.10734.3.3.2.10.11.10	Maximum percent of traffic being inspected by this device as a ratio of the stack Rx traffic to tier 1 per 10,000 (percent value times 100).

SSL inspection objects

SSL Inspection (SslInsp) objects provide information about SSL inspection activity.

OBJECT	OID	DESCRIPTION
npstatsSslInsp	1.3.6.1.4.1.10734.3.3.2.10.5	Sub-tree for all SSL inspection statistics.
npstatsSslInspCurrentSessions	1.3.6.1.4.1.10734.3.3.2.10.5.1	The current number of active SSL sessions. This value is not real-time and will lag approximately 2 minutes from actual, due to the time interval for calculating the rate.
npstatsSslInspConnectionRate	1.3.6.1.4.1.10734.3.3.2.10.5.2	The average SSL connection rate in connections per second.
npstatsSslInspBlockedMaxConnections	1.3.6.1.4.1.10734.3.3.2.10.5.3	The number of blocked SSL sessions due to maximum connection limit.
npstatsSslInspPassedMaxConnections	1.3.6.1.4.1.10734.3.3.2.10.5.4	The number of passed (not inspected) SSL sessions due to maximum connection limit.
npstatsSslInspTotalBytesIn	1.3.6.1.4.1.10734.3.3.2.10.5.5	The number of inspected inbound SSL bytes.
npstatsSslInspTotalBytesOut	1.3.6.1.4.1.10734.3.3.2.10.5.6	The number of inspected outbound SSL bytes.

TPT-POLICY-MIB

The following notifications are generated by policy actions:

OBJECT	OID	DESCRIPTION
tptPolicyNotify	1.3.6.1.4.1.10734.3.3.3.0.8	The notification that a policy action has resulted from a signature match.

OBJECT	OID	DESCRIPTION
tptPolicyNotifyClientip	1.3.6.1.4.1.10734.3.3.3.1.139	The client IP address associated with the notification. This value is always set to "".
tptPolicyNotifyDeviceID	1.3.6.1.4.1.10734.3.3.3.1.11	The unique identifier of the device sending the policy notification.
tptPolicyNotifyMetadata	1.3.6.1.4.1.10734.3.3.3.1.140	Additional event information associated with the notification. Because this object is targeted for future support, this value is always set to N/A.
tptPolicyNotifyPolicyID	1.3.6.1.4.1.10734.3.3.3.1.12	The unique identifier of the policy that causes the notification.
tptPolicyNotifySignatureID	1.3.6.1.4.1.10734.3.3.3.1.13	The unique identifier of the signature matching the incoming data stream.
tptPolicyNotifySegmentName (obsolete)	1.3.6.1.4.1.10734.3.3.3.1.14	The name of the segment to which the notification applies. Not included in notification.
tptPolicyNotifySrcNetAddr	1.3.6.1.4.1.10734.3.3.3.1.15	The IPv4 address of the source of the packet that triggered the policy action.
tptPolicyNotifySrcNetAddrV6	1.3.6.1.4.1.10734.3.3.3.1.128	The IPv6 address of the source of the packet that triggered the policy action.
tptPolicyNotifySrcNetPort	1.3.6.1.4.1.10734.3.3.3.1.16	The source port of the packet that triggered the policy action.
tptPolicyNotifyDestNetAddr	1.3.6.1.4.1.10734.3.3.3.1.17	The IPv4 address of the destination of the packet that triggered the policy action.

OBJECT	OID	DESCRIPTION
tptPolicyNotifyDestNetAddrV6	1.3.6.1.4.1.10734.3.3.3.1.129	The IPv6 address of the destination of the packet that triggered the policy action.
tptPolicyNotifyDestNetPort	1.3.6.1.4.1.10734.3.3.3.1.18	The destination port of the packet that triggered the policy action.
tptPolicyNotifyStartTimeSec	1.3.6.1.4.1.10734.3.3.3.1.19	The time at which the policy was first triggered, marking the start of the aggregation period for this notification. Measured in seconds since January 1, 1970.
tptPolicyNotifyAlertAction	1.3.6.1.4.1.10734.3.3.3.1.20	The action associated with this notification. <ul style="list-style-type: none">• 1: deny• 2: allow
tptPolicyNotifyConfigAction	1.3.6.1.4.1.10734.3.3.3.1.21	The action configured for the policy, which in some cases can differ from the action associated with the notification. <ul style="list-style-type: none">• 1: deny• 2: allow
tptPolicyNotifyComponentID	1.3.6.1.4.1.10734.3.3.3.1.22	The component identifier of the policy that causes the notification: <ul style="list-style-type: none">• 0: invalid• 1: deny• 2: allow• 7: alert• 8: block• 9: peer

OBJECT	OID	DESCRIPTION
tptPolicyNotifyHitCount	1.3.6.1.4.1.10734.3.3.3.1.23	The number of policy hits occurring during the aggregation period for this notification.
tptPolicyNotifyAggregationPeriod	1.3.6.1.4.1.10734.3.3.3.1.24	The duration of the aggregation period for this notification, in minutes.
tptPolicyNotifySeverity	1.3.6.1.4.1.10734.3.3.3.1.25	The severity of the attack. <ul style="list-style-type: none"> • 1: low • 2: minor • 3: major • 4: critical
tptPolicyNotifyProtocol	1.3.6.1.4.1.10734.3.3.3.1.26	The network protocol of the packet(s) that triggered the policy action. <ul style="list-style-type: none"> • 1: ICMP • 2: UDP • 3: TCP • 4: other IP • 5: ARP • 6: other ETH • 7: ICMP v6 • 8: other IPV6
tptPolicyNotifyAlertTimeSec	1.3.6.1.4.1.10734.3.3.3.1.27	The time that the alert was initiated, marking the end of the aggregation period for this notification. Measured in seconds since January 1, 1970.
tptPolicyNotifyAlertTimeNano	1.3.6.1.4.1.10734.3.3.3.1.28	The nanoseconds portion of the AlertTimeSec object.

OBJECT	OID	DESCRIPTION
tptPolicyNotifyPacketTrace	1.3.6.1.4.1.10734.3.3.3.1.29	Indicates if a corresponding packet trace was logged. <ul style="list-style-type: none"> • 0: not logged • 1: logged.
tptPolicyNotifySequence	1.3.6.1.4.1.10734.3.3.3.1.30	The log file entry sequence number corresponding to this notification. This value is always set to 0 (zero).
tptPolicyNotifyTraceBucket	1.3.6.1.4.1.10734.3.3.3.1.36	The bucket identifier for a packet trace.
tptPolicyNotifyTraceBegin	1.3.6.1.4.1.10734.3.3.3.1.37	The starting sequence number for a packet trace.
tptPolicyNotifyTraceEnd	1.3.6.1.4.1.10734.3.3.3.1.38	The ending sequence number for a packet trace.
tptPolicyNotifyMessageParameters	1.3.6.1.4.1.10734.3.3.3.1.39	A string containing parameters separated by vertical bars () that match information tagged with Message in the Digital Vaccine.
tptPolicyNotifyStartTimeNano	1.3.6.1.4.1.10734.3.3.3.1.40	The nanoseconds portion of StartTimeSec.
tptPolicyNotifyAlertType	1.3.6.1.4.1.10734.3.3.3.1.41	A bit field defined as follows: <ul style="list-style-type: none"> • 0x0001 = Alert • 0x0002 = Block • 0x0020 = Peer-to-peer • 0x0040 = Invalid • 0x0080 = Threshold • 0x0100 = Management.
tptPolicyNotifyInputMphys	1.3.6.1.4.1.10734.3.3.3.1.57	The incoming physical port of the triggering packet(s).

OBJECT	OID	DESCRIPTION
tptPolicyNotifyVlanTag	1.3.6.1.4.1.10734.3.3.3.1.58	The VLAN tag of the triggering packet(s).
tptPolicyNotifyZonePair	1.3.6.1.4.1.10734.3.3.3.1.59	A string that identifies the port pair related to this notification. This value is always set to "".
tptPolicyNotifyActionSetID	1.3.6.1.4.1.10734.3.3.3.1.130	The action set UUID associated with this notification.
tptPolicyNotifyRate	1.3.6.1.4.1.10734.3.3.3.1.131	The rate-limit, in kbps, of the action set associated with this notification.
tptPolicyNotifyFlowControl	1.3.6.1.4.1.10734.3.3.3.1.137	The action set flow control associated with this notification.
tptPolicyNotifyActionSetName	1.3.6.1.4.1.10734.3.3.3.1.138	The action set name associated with this notification.
tptPolicyNotifySslInspected	.1.3.6.1.4.1.10734.3.3.3.1.180	A flag indicating if the notification is associated with an inspected SSL data stream. This flag is only present on IPS and Quarantine events and doesn't apply to Reputation. 1: Yes 2: No
tptPolicyNotifyVirtualSegment	.1.3.6.1.4.1.10734.3.3.3.1.182	Virtual segment associated with this notification.
tptPolicyNotifySslInspEventTy pe	.1.3.6.1.4.1.10734.3.3.3.1.190	The SSL connection type. 1: inbound 2: outbound (not supported)

OBJECT	OID	DESCRIPTION
tptPolicyNotifySslInspAction	.1.3.6.1.4.1.10734.3.3.3.1.19 1	The SSL connection action taken <ul style="list-style-type: none"> • 1: decrypted • 2: notDecrypted • 3: blocked
tptPolicyNotifySslInspDetails	.1.3.6.1.4.1.10734.3.3.3.1.19 2	Free-form field that provides additional details for the action taken on a SSL connection
tptPolicyNotifySslInspPolicy	.1.3.6.1.4.1.10734.3.3.3.1.19 3	The SSL inspection policy.
tptPolicyNotifySslInspCert	.1.3.6.1.4.1.10734.3.3.3.1.19 4	The certificate used to decrypt SSL traffic.
tptPolicyNotifySslInspClntIF	.1.3.6.1.4.1.10734.3.3.3.1.19 5	The client-side interface receiving SSL traffic.
tptPolicyNotifySslInspClntSslVer	.1.3.6.1.4.1.10734.3.3.3.1.19 6	The client-side SSL protocol version. <ul style="list-style-type: none"> • 1: unknown • 2: sslv3 • 3: tls10 • 4: tls11 • 5: tls12
tptPolicyNotifySslInspClntCrypto	.1.3.6.1.4.1.10734.3.3.3.1.19 7	The client-side SSL crypto-suite.
tptPolicyNotifySslInspSrvIF	.1.3.6.1.4.1.10734.3.3.3.1.19 8	The server-side interface sending SSL traffic.

OBJECT	OID	DESCRIPTION
tptPolicyNotifySslInspSrvSslVersion	.1.3.6.1.4.1.10734.3.3.3.1.199	The server-side SSL protocol version. <ul style="list-style-type: none"> • 1: unknown • 2: sslv3 • 3: tls10 • 4: tls11 • 5: tls12
tptPolicyNotifySslInspSrvCrypto	.1.3.6.1.4.1.10734.3.3.3.1.200	The server-side SSL crypto-suite.

The following variables apply to various policy statistics.

OBJECT	OID	DESCRIPTION
policyPacketsDropped	1.3.6.1.4.1.10734.3.3.2.1.1.0	The total number of packets discarded because of network congestion.
policyPacketsDropped64	1.3.6.1.4.1.10734.3.3.2.1.31.0	The total number of 64-bit packets discarded because of network congestion.
policyPacketsBlocked	1.3.6.1.4.1.10734.3.3.2.1.2.0	The cumulative number of packets blocked by policy actions.
policyPacketsBlocked64	1.3.6.1.4.1.10734.3.3.2.1.32.0	The total number of 64-bit packets blocked by policy actions.
policyPacketsIncoming	1.3.6.1.4.1.10734.3.3.2.1.3.0	The total number of incoming packets.
policyPacketsIncoming64	1.3.6.1.4.1.10734.3.3.2.1.33.0	The total number of incoming 64-bit packets.
policyPacketsOutgoing	1.3.6.1.4.1.10734.3.3.2.1.4.0	The total number of outgoing packets.

OBJECT	OID	DESCRIPTION
policyPacketsOutgoing64	1.3.6.1.4.1.10734.3.3.2.1.34.0	The total number of outgoing 64-bit packets.
policyPacketsInvalid	1.3.6.1.4.1.10734.3.3.2.1.6.0	The total number of packets discarded because they were invalid.
policyPacketsInvalid64	1.3.6.1.4.1.10734.3.3.2.1.36.0	The total number of 64-bit packets discarded because they were invalid.
policyPacketsPermitted	1.3.6.1.4.1.10734.3.3.2.1.7.0	The cumulative number of packets permitted because of policy actions.
policyPacketsPermitted64	1.3.6.1.4.1.10734.3.3.2.1.37.0	The cumulative number of 64-bit packets permitted because of policy actions.
policyPacketsRateLimited64	1.3.6.1.4.1.10734.3.3.2.1.38.0	The total number of 64-bit packets discarded by rate-limiting filters.
policyPacketsTrusted64	1.3.6.1.4.1.10734.3.3.2.1.39.0	The cumulative number of 64-bit packets trusted because of policy actions.

The following variable applies to Digital Vaccine (DV) statistics.

OBJECT	OID	DESCRIPTION
policyDVObjs	1.3.6.1.4.1.10734.3.3.2.1.10.1.0	Sub-tree of Digital Vaccine information.

The following table ranks the top ten policies according to hit count.

OBJECT	OID	DESCRIPTION
topTenHitsByPolicyTable	1.3.6.1.4.1.10734.3.3.2.1.11	Table of the ten policies with the largest number of hit counts.

OBJECT	OID	DESCRIPTION
topTenHitsByPolicyEntry	1.3.6.1.4.1.10734.3.3.2.1.11.1	An entry in the top ten policies table.
topTenRank	1.3.6.1.4.1.10734.3.3.2.1.11.1.1	The numerical ranking of the policy in the table. A rank of 1 indicates the policy has the largest number of hits.
policyHitCount	1.3.6.1.4.1.10734.3.3.2.1.11.1.2	The number of alerts generated by the policy.
policyName	1.3.6.1.4.1.10734.3.3.2.1.11.1.3	The policy name.
policyUUID	1.3.6.1.4.1.10734.3.3.2.1.11.1.4	The global identifier of the policy.

The following variables apply to statistics of all policies at each protocol.

OBJECT	OID	DESCRIPTION
alertsByProtocolTable	1.3.6.1.4.1.10734.3.3.2.1.13	Table of alert counts of all policies at each protocol.
alertsByProtocolEntry	1.3.6.1.4.1.10734.3.3.2.1.13.1	An entry in the alerts by protocol table.
alertProtocol	1.3.6.1.4.1.10734.3.3.2.1.13.1.1	Alerts of all policies at each protocol. <ul style="list-style-type: none"> • 1: ICMP • 2: UDP • 3: TCP • 4: other IP • 5: ARP • 6: other ETH • 7: ICMP v6 • 8: other IPv6

OBJECT	OID	DESCRIPTION
protocolAlertCount	1.3.6.1.4.1.10734.3.3.2.1.13.1.2	The number of alerts generated by all policies of a given protocol.
packetsByProtocolTable	1.3.6.1.4.1.10734.3.3.2.1.20	Table of packet counts received in each protocol.
packetsByProtocolEntry	1.3.6.1.4.1.10734.3.3.2.1.20.1	An entry in the packets by protocol table. Rows cannot be added or deleted.
packetProtocol	1.3.6.1.4.1.10734.3.3.2.1.20.1.1	The protocol of a policy. <ul style="list-style-type: none">• 1: ICMP• 2: UDP• 3: TCP• 4: other IP• 5: ARP• 6: other ETH• 7: ICMP v6• 8: other IPv6
protocolPacketCount	1.3.6.1.4.1.10734.3.3.2.1.20.1.2	The count of packets received for a given protocol. <ul style="list-style-type: none">• 1: ICMP• 2: UDP• 3: TCP• 4: other IP• 5: ARP• 6: other ETH• 7: ICMP v6• 8: other IPv6

The following variables apply to information and statistics related to the security zone port pair.

OBJECT	OID	DESCRIPTION
securityZonePairTable	1.3.6.1.4.1.10734.3.3.2.1.22	Table of information and statistics for each virtual segment.
securityZonePairEntry	1.3.6.1.4.1.10734.3.3.2.1.22.1	An entry in the table.
szpName	1.3.6.1.4.1.10734.3.3.2.1.22.1.1	The name of a security zone pair. Each of the 48 zone pairs is identified by unique octet strings.
szpInZoneName	1.3.6.1.4.1.10734.3.3.2.1.22.1.2	The name of the input security zone for each of the 48 security zone pairs.
szpOutZoneName	1.3.6.1.4.1.10734.3.3.2.1.22.1.3	The name of the output security zone for each of the 48 security zone pairs.
szpUUID	1.3.6.1.4.1.10734.3.3.2.1.22.1.4	The UUID for each of the 48 security zone pairs.
szpInZoneUUID	1.3.6.1.4.1.10734.3.3.2.1.22.1.5	The UUID of the input security zone for each of the 48 security zone pairs.
szpOutZoneUUID	1.3.6.1.4.1.10734.3.3.2.1.22.1.6	The UUID of the output security zone for each of the 48 security zone pairs.
szpInPackets	1.3.6.1.4.1.10734.3.3.2.1.22.1.7	The number of packets received for each of the 48 security zone pairs.
szpInOctets	1.3.6.1.4.1.10734.3.3.2.1.22.1.8	The number of bytes received for each of the 48 security zone pairs.

OBJECT	OID	DESCRIPTION
szpAlerts	1.3.6.1.4.1.10734.3.3.2.1.22.1.9	The number of alerts (blocks + permits) for each of the 48 security zone pairs.
szpBlocks	1.3.6.1.4.1.10734.3.3.2.1.22.1.10	The number of blocks generated for each of the 48 security zone pairs.
szpPermits	1.3.6.1.4.1.10734.3.3.2.1.22.1.11	The number of permits generated for each of the 48 security zone pairs.
szpPrecedence	1.3.6.1.4.1.10734.3.3.2.1.22.1.12	The precedence for each of the 48 security zone pairs.

The following variables apply to statistics for each physical port.

OBJECT	OID	DESCRIPTION
portStatsTable	1.3.6.1.4.1.10734.3.3.2.1.23	Table of statistics for each physical port.
portStatsEntry	1.3.6.1.4.1.10734.3.3.2.1.23.1	An entry in the port statistics table. Rows cannot be added or deleted.
portNumber	1.3.6.1.4.1.10734.3.3.2.1.23.1.1	The numeric index of a port. <ul style="list-style-type: none"> • 1: 0 • 2: 1 • 3: 2
portName	1.3.6.1.4.1.10734.3.3.2.1.23.1.2	The name of a port. <ul style="list-style-type: none"> • 1: 1A • 2: 1B • 3: 2A
portVlanTranslations	1.3.6.1.4.1.10734.3.3.2.1.23.1.3	The number of packets leaving this egress port whose VLAN IDs were translated.

TPT-PORT-CONFIG-MIB

Describes information about the device port configuration.

OBJECT	OID	DESCRIPTION
portConfigTable	1.3.6.1.4.1.10734.3.3.2.4.1	Table of ports on the device and their configuration settings. For TPS devices, the loopback column has no meaning and is set to 0.
portConfigEntry	1.3.6.1.4.1.10734.3.3.2.4.1.1	An entry in the ports table.
portConfigSlot	1.3.6.1.4.1.10734.3.3.2.4.1.1.1	The segment on which the port is located.
portConfigPort	1.3.6.1.4.1.10734.3.3.2.4.1.1.2	The port number.
portConfigLineSpeed	1.3.6.1.4.1.10734.3.3.2.4.1.1.3	The line speed configuration: <ul style="list-style-type: none"> • 0: default • 1: 1GbE • 2: 100 Mb • 3: 10 Mb • 4: 10 GbE • 5: 40 GbE • 6: 25 GbE • 7: 100 GbE
portConfigDuplex	1.3.6.1.4.1.10734.3.3.2.4.1.1.4	The duplex configuration. <ul style="list-style-type: none"> • 0: default • 1: half • 2: full

OBJECT	OID	DESCRIPTION
portConfigAutoNeg	1.3.6.1.4.1.10734.3.3.2.4.1.1.5	The auto-negotiation configuration. <ul style="list-style-type: none"> • 0: default • 1: on • 2: off
portConfigShutdown	1.3.6.1.4.1.10734.3.3.2.4.1.1.6	The shutdown configuration. <ul style="list-style-type: none"> • 0: disabled—The port can come up normally. • 1: enabled—The port is either manually removed from service or link-down synchronization takes it out of service.
portConfigLoopback	1.3.6.1.4.1.10734.3.3.2.4.1.1.7	The loopback configuration. Because loopback is unsupported, it is always set to 0 (disabled).
portConfigFailover	1.3.6.1.4.1.10734.3.3.2.4.1.1.8	The failover action configuration: <ul style="list-style-type: none"> • 0: block • 1: permit
portConfigLDMode	1.3.6.1.4.1.10734.3.3.2.4.1.1.9	The link-down synchronization mode. <ul style="list-style-type: none"> • 0: hub • 1: breaker • 2: write
portConfigLDSTimeout	1.3.6.1.4.1.10734.3.3.2.4.1.1.10	The link-down synchronization timeout configuration.

TPT-RESOURCE-MIB

Describes filesystem, CPU, memory, temperature, power supply, and fan information for the device.

Notifications

The following notifications send information to the management system about the system resources.

OBJECT	OID	DESCRIPTION
tptResourceNotify	1.3.6.1.4.1.10734.3.3.3.0.14	Sub-tree of notifications that indicate when a resource parameter has crossed a predefined threshold.
tptResourceNotifyDeviceID	1.3.6.1.4.1.10734.3.3.3.1.61	The unique identifier of the device sending the notification.
tptResourceNotifyIdentifier	1.3.6.1.4.1.10734.3.3.3.1.62	The type of resource that triggered the notification. ⁽¹⁾ <ul style="list-style-type: none"> • 1: filesystem • 2: CPU • 3: memory • 4: chassis temperature • 5: fan • 6: power supply
tptResourceNotifyFSIndex	1.3.6.1.4.1.10734.3.3.3.1.63	For a filesystem resource, the value is the resource filesystem's table index (resourceFSIndex) that generated the notification. Otherwise, the value is 0 (zero).
tptResourceNotifyCurrentValue	1.3.6.1.4.1.10734.3.3.3.1.64	The current value of the resource that triggered this notification.

⁽¹⁾This object is deprecated. For the current object, see tptResourceNotifyHWIdentifier in the last row of the table.

OBJECT	OID	DESCRIPTION
tptResourceNotifyThresholdMaj	1.3.6.1.4.1.10734.3.3.3.1.6 5	The major threshold of this resource (between green and yellow states).
tptResourceNotifyThresholdCrit	1.3.6.1.4.1.10734.3.3.3.1.6 6	The critical threshold of this resource (between yellow and red states).
tptResourceNotifyRangeMin	1.3.6.1.4.1.10734.3.3.3.1.6 7	The minimum end of the range of values that this resource can take.
tptResourceNotifyRangeMax	1.3.6.1.4.1.10734.3.3.3.1.6 8	The maximum end of the range of values that this resource can take.
tptResourceNotifyStateBefore	1.3.6.1.4.1.10734.3.3.3.1.6 9	The state of the resource before the current threshold transition.
tptResourceNotifyStateAfter	1.3.6.1.4.1.10734.3.3.3.1.7 0	The state of this resource after the current threshold transition.
tptResourceNotifyTimeStamp	1.3.6.1.4.1.10734.3.3.3.1.7 1	The timestamp of the event that generated the notification, in seconds since January 1, 1970.
tptResourceNotifySubIdentifier	1.3.6.1.4.1.10734.3.3.3.1.7 2	Sub-Identifier of the instance of the resource that triggers this notification. It is not used in 5100N devices or earlier; for these models, the value is 0 (zero).

OBJECT	OID	DESCRIPTION
tptResourceNotifyHWIdentifier	1.3.6.1.4.1.10734.3.3.1.73	The type of resource that triggered the notification. <ul style="list-style-type: none"> • 0: sal • 1: CPU • 2: memory • 3: filesystem • 5: fan • 6: chassis temperature • 7: voltage • 10: power supply • 11: high availability • 12: audit log

File system

The following objects provide information about the device file system objects:

OBJECT	OID	DESCRIPTION
resourceNumberOfFilesystems	1.3.6.1.4.1.10734.3.3.2.5.1	Number of filesystems on the device's hard disk
resourceFSTable	1.3.6.1.4.1.10734.3.3.2.5.2	Table of filesystem resource information
resourceFSEntry	1.3.6.1.4.1.10734.3.3.2.5.2.1	An entry in the resource filesystem table. Rows cannot be added or deleted.
resourceFSInUseMB	1.3.6.1.4.1.10734.3.3.2.5.2.1.1	Number of MB in use for the filesystem
resourceFSThresholdMaj	1.3.6.1.4.1.10734.3.3.2.5.2.1.2	Major threshold for the percent of MB in use for the filesystem

OBJECT	OID	DESCRIPTION
resourceFSThresholdCrit	1.3.6.1.4.1.10734.3.3.2.5.2.1.3	Critical threshold for the percent of MB in use for the filesystem
resourceFSRangeMin	1.3.6.1.4.1.10734.3.3.2.5.2.1.4	Minimum value of the range of MB in use, usually 0 (zero)
resourceFSRangeMax	1.3.6.1.4.1.10734.3.3.2.5.2.1.5	Total size in MB of the filesystem
resourceFSName	1.3.6.1.4.1.10734.3.3.2.5.2.1.6	Name of this filesystem
resourceFSIndex	1.3.6.1.4.1.10734.3.3.2.5.2.1.7	Unique identifier for a given file system entry in the table

Memory

The following table provides information about the device memory usage objects:

OBJECT	OID	DESCRIPTION
resourceHPMemoryObjs	1.3.6.1.4.1.10734.3.3.2.5.3	Sub-tree of host processor memory information
resourceHPMemoryInUsePercent	1.3.6.1.4.1.10734.3.3.2.5.3.1	Percentage of host processor memory in use
resourceHPMemoryThresholdMajor	1.3.6.1.4.1.10734.3.3.2.5.3.2	Major threshold value for host processor memory usage
resourceHPMemoryThresholdCritical	1.3.6.1.4.1.10734.3.3.2.5.3.3	Critical threshold value for host processor memory usage
resourceHPMemoryRangeMin	1.3.6.1.4.1.10734.3.3.2.5.3.4	Minimum percentage of host processor memory usage, usually 0 (zero)

OBJECT	OID	DESCRIPTION
resourceHPMemoryRangeMax	1.3.6.1.4.1.10734.3.3.2.5.3.5	Maximum percentage of host processor memory usage, usually 100
resourceHPMemoryTotal	1.3.6.1.4.1.10734.3.3.2.5.3.6	Total size in megabytes of host processor memory

CPU

The following table provides information about CPU usage objects:

OBJECT	OID	DESCRIPTION
resourceHPCPUObjs	1.3.6.1.4.1.10734.3.3.2.5.4	Sub-tree of host processor CPU information
resourceHPCPUBusyPercent	1.3.6.1.4.1.10734.3.3.2.5.4.1	Percentage of host processor CPU that is currently busy
resourceHPCPUThresholdMaj	1.3.6.1.4.1.10734.3.3.2.5.4.2	Major threshold value for host processor CPU activity
resourceHPCPUThresholdCrit	1.3.6.1.4.1.10734.3.3.2.5.4.3	Critical threshold value of host processor CPU activity
resourceHPCPURangeMin	1.3.6.1.4.1.10734.3.3.2.5.4.4	Minimum percentage of host processor CPU activity, usually 0 (zero)
resourceHPCPURangeMax	1.3.6.1.4.1.10734.3.3.2.5.4.5	Maximum percentage of host processor CPU activity, usually 100
resourceNPCPUBusyPercentA	1.3.6.1.4.1.10734.3.3.2.5.4.6	Total Utilization of XLR A
resourceNPCPUBusyPercentTie r2A	1.3.6.1.4.1.10734.3.3.2.5.4.7	F Thread Utilization of XLR A
resourceNPCPUBusyPercentTie r3A	1.3.6.1.4.1.10734.3.3.2.5.4.8	KS Thread Utilization of XLR A

OBJECT	OID	DESCRIPTION
resourceNPCPUBusyPercentTie r4A	1.3.6.1.4.1.10734.3.3.2.5.4.9	L Thread Utilization of XLR A
resourceNPCPUBusyPercentB	1.3.6.1.4.1.10734.3.3.2.5.4.10	Total Utilization of XLR B
resourceNPCPUBusyPercentTie r2B	1.3.6.1.4.1.10734.3.3.2.5.4.11	F Thread Utilization of XLR B
resourceNPCPUBusyPercentTie r3B	1.3.6.1.4.1.10734.3.3.2.5.4.12	KS Thread Utilization of XLR B
resourceNPCPUBusyPercentTie r4B	1.3.6.1.4.1.10734.3.3.2.5.4.13	L Thread Utilization of XLR B
resourceNPCPUBusyPercentC	1.3.6.1.4.1.10734.3.3.2.5.4.14	Total Utilization of XLR C
resourceNPCPUBusyPercent2C	1.3.6.1.4.1.10734.3.3.2.5.4.15	F Thread Utilization of XLR C
resourceNPCPUBusyPercent3C	1.3.6.1.4.1.10734.3.3.2.5.4.16	KS Thread Utilization of XLR C
resourceNPCPUBusyPercent4C	1.3.6.1.4.1.10734.3.3.2.5.4.17	L Thread Utilization of XLR C

Chassis temperature

The following table provide information about the chassis temperature objects:

OBJECT	OID	DESCRIPTION
resourceChassisTempObjs	1.3.6.1.4.1.10734.3.3.2.5.5	Sub-tree of chassis temperature information
resourceChassisTempDegreesC	1.3.6.1.4.1.10734.3.3.2.5.5.1	Chassis temperature
resourceChassisTempThresholdM aj	1.3.6.1.4.1.10734.3.3.2.5.5.2	Major threshold value for chassis temperature
resourceChassisTempThresholdC rit	1.3.6.1.4.1.10734.3.3.2.5.5.3	Critical threshold value of chassis temperature

OBJECT	OID	DESCRIPTION
resourceChassisTempRangeMin	1.3.6.1.4.1.10734.3.3.2.5.5.4	Minimum value of the chassis temperature range
resourceChassisTempRangeMax	1.3.6.1.4.1.10734.3.3.2.5.5.5	Maximum value of the chassis temperature range

**Important**

All values are in degrees Centigrade.

Power supply

The following table provides information about the power supply objects:

OBJECT	OID	DESCRIPTION
resourcePowerSupplyObjs	1.3.6.1.4.1.10734.3.3.2.5.9	Sub-tree of power supply information
resourcePowerSupplyQuantity	1.3.6.1.4.1.10734.3.3.2.5.9.2	Number of power supplies
resourcePowerSupplyMonitoring	1.3.6.1.4.1.10734.3.3.2.5.9.3	Indicates if power supply monitoring is enabled: <ul style="list-style-type: none"> • 0: disabled • 1: enabled
resourcePowerSupplyTable	1.3.6.1.4.1.10734.3.3.2.5.9.4	Table of power supplies on the device. The number of entries depends on the value of the resourcePowerSupplyQuantity object. The maximum number of entries depends on the implementation.
resourcePowerSupplyEntry	1.3.6.1.4.1.10734.3.3.2.5.9.4.1	An entry in the power supply table. Rows cannot be created or deleted.

OBJECT	OID	DESCRIPTION
powerSupplyUnitIndex	1.3.6.1.4.1.10734.3.3.2.5.9.4.1.1	Index of the power supply units on a device. The first entry is 1.
powerSupplyStatus	1.3.6.1.4.1.10734.3.3.2.5.9.4.1.2	If the device has dual power supplies and power supply monitoring is enabled, this value indicates whether one or both power supplies is functional: <ul style="list-style-type: none"> • 1: red—critical • 2: green—normal

System information

The following table provides information about the system objects:

OBJECT	OID	DESCRIPTION
resourceDateTime	1.3.6.1.4.1.10734.3.3.2.5.10	Current date and time of device in seconds since January 1, 1970. There is no time zone offset.
resourceSnmpRunState	1.3.6.1.4.1.10734.3.3.2.5.11	Indicates which SNMP versions are running: <ul style="list-style-type: none"> • 0: none • 1: SNMP v2 • 2: SNMP v3 • 3: Both v2 and v3

OBJECT	OID	DESCRIPTION
resourceSnmpConfig	1.3.6.1.4.1.10734.3.3.2.5.12	Indicates which SNMP versions are configured: <ul style="list-style-type: none"> • 0: none • 1: SNMP v2 • 2: SNMP v3 • 3: Both v2 and v3
resourceRemoteAuthEnabled	1.3.6.1.4.1.10734.3.3.2.5.13	Indicates whether remote authentication is enabled
resourceRemoteAuthTimeout	1.3.6.1.4.1.10734.3.3.2.5.14	The remote authentication timeout in seconds

TPT-SFLOW

Provides sFlow status and collector information. The sFlow statistics are sent from the collector to the device.

sFlow collectors

OBJECT	OID	DESCRIPTION
sFlowCollectorTable	1.3.6.1.4.1.10734.3.3.2.18.1	Table of sFlow collectors. Up to two collectors are supported.
sFlowCollectorEntry	1.3.6.1.4.1.10734.3.3.2.18.1.1	A collector address and port in the sFlowCollectorTable. Rows cannot be created or deleted.
collectorIndex	1.3.6.1.4.1.10734.3.3.2.18.1.1.1	Index into the sFlow collector table, starting with 1.
collectorAddr	1.3.6.1.4.1.10734.3.3.2.18.1.1.2	The IPv4 address of the collector. If the address is not set, the value will be an empty string.

OBJECT	OID	DESCRIPTION
udpPort	1.3.6.1.4.1.10734.3.3.2.18.1.1.3	The UDP port of the collector.
collectorAddrV6	1.3.6.1.4.1.10734.3.3.2.18.1.1.4	The IPv6 address of the collector. If the address is not set, the value will be an empty string.

sFlow status

OBJECT	OID	DESCRIPTION
sFlowStatus	1.3.6.1.4.1.10734.3.3.2.18.2	sFlow status for the device: <ul style="list-style-type: none"> • 0: disabled • 1: enabled • 2: error • 3: not applicable

TPT-SMSMIBS

Defines interactions between the SMS and the customer's NMS.

SMS top level MIBs

OBJECT	OID	DESCRIPTION
tpt-sms-conf	1.3.6.1.4.1.10734.3.4.1	SMS conformance objects subtree.
tpt-sms-objs	1.3.6.1.4.1.10734.3.4.2	SMS managed objects subtree.
tpt-sms-events	1.3.6.1.4.1.10734.3.4.3	SMS events sub-tree that includes all payload variables needed for notifications.

SMS conformance top-level MIBs

OBJECT	OID	DESCRIPTION
tpt-sms-groups	1.3.6.1.4.1.10734.3.4.1.1	SMS groups sub-tree.
tpt-sms-compls	1.3.6.1.4.1.10734.3.4.1.2	SMS compliance MIBs sub-tree.

SMS notification top-level MIBs

OBJECT	OID	DESCRIPTION
tpt-sms-eventsV2	1.3.6.1.4.1.10734.3.4.3.0	SMS events notification MIBs.
tpt-sms-notifypayload	1.3.6.1.4.1.10734.3.4.3.1	SMS MIB variables sent as part of a notification payload.

Model number objects

OBJECT	OID	DESCRIPTION
tpt-sms-family	1.3.6.1.4.1.10734.1.4	Registration for the SMS.

TPT-SMS-TRAP-MIB

Describes the notifications sent to and from an SMS device.

SMS Notification MIBs

OBJECT	OID	DESCRIPTION
tptSmsQuarantineRequest	1.3.6.1.4.1.10734.3.4.3.0.1	The SMS asks an external NMS to quarantine an endstation using the data embedded in the request.
tptSmsQuarantineAck	1.3.6.1.4.1.10734.3.4.3.0.2	The external NMS notifies the SMS that a quarantine request was processed.

OBJECT	OID	DESCRIPTION
tptSmsQuarantineReleaseRequest	1.3.6.1.4.1.10734.3.4.3.0.3	The SMS asks an external NMS to unquarantine an endstation using the data embedded in the request.
tptSmsQuarantineReleaseAck	1.3.6.1.4.1.10734.3.4.3.0.4	The external NMS notifies the SMS that an unquarantine request was processed.
tptSmsQuarantinePolicyNotification	1.3.6.1.4.1.10734.3.4.3.0.5	The SMS sends notification of a policy match.
tptSmsUnQuarantineRequest	1.3.6.1.4.1.10734.3.4.3.0.6	Commands the SMS to unquarantine an endstation.
tptSmsQuarantineCommand	1.3.6.1.4.1.10734.3.4.3.0.14	Commands the SMS to quarantine an endstation.
tptSmsBoot	1.3.6.1.4.1.10734.3.4.3.0.7	Indicates that the SMS has booted.
tptSmsReboot	1.3.6.1.4.1.10734.3.4.3.0.8	Indicates that the SMS is rebooting.
tptSmsShuttingDown	1.3.6.1.4.1.10734.3.4.3.0.9	Indicates that the system is shutting down.
tptSmsReady	1.3.6.1.4.1.10734.3.4.3.0.10	Indicates that the system is ready.
tptSmsAuthenticationError	1.3.6.1.4.1.10734.3.4.3.0.11	Indicates that an authentication error has occurred.
tptSmsEgpNeighborDownstate	1.3.6.1.4.1.10734.3.4.3.0.12	Indicates that the EGP neighbor is going to downstate.
tptSmsSystemRestart	1.3.6.1.4.1.10734.3.4.3.0.13	Indicates that the server process has restarted.

OBJECT	OID	DESCRIPTION
tptSmsRepDvVerifySuccess	1.3.6.1.4.1.10734.3.4.3.0.15	Indicates that the Reputation DV was downloaded and verified.
tptSmsRepDvVerifyFail	1.3.6.1.4.1.10734.3.4.3.0.16	Indicates that the Reputation DV downloaded but that verification failed.
tptSmsTest	1.3.6.1.4.1.10734.3.4.3.0.17	SMS test trap.
tptSmsRebootingDevice	1.3.6.1.4.1.10734.3.4.3.0.18	Indicates that the SMS is rebooting a device.
tptDeviceNonComm	1.3.6.1.4.1.10734.3.4.3.0.19	Indicates that the SMS lost communication with a device.
tptDeviceBooted	1.3.6.1.4.1.10734.3.4.3.0.20	Indicates that a device was rebooted.

SMS MIB Variables

OBJECT	OID	DESCRIPTION
tptSmsQuarantineNotifyId	1.3.6.1.4.1.10734.3.4.3.1.1	A unique incrementing integer assigned to each quarantine event.
tptSmsQuarantineNotifyData	1.3.6.1.4.1.10734.3.4.3.1.2	A string that identifies the device to be quarantined. The format is NAME:VALUE. Multiple parameters are separated by a new line.
tptSmsQuarantinePolicyMatchData	1.3.6.1.4.1.10734.3.4.3.1.3	A string that identifies the matching policy.
tptSmsQuarantineNotifyType	1.3.6.1.4.1.10734.3.4.3.1.4	A string that identifies the type of quarantine.
tptSmsQuarantineDeviceIP	1.3.6.1.4.1.10734.3.4.3.1.5	The IP address used as a trap parameter.

OBJECT	OID	DESCRIPTION
tptSmsQuarantineDeviceMAC	1.3.6.1.4.1.10734.3.4.3.1.6	The MAC address used as a trap parameter.
tptSmsQuarantineSwitchPort	1.3.6.1.4.1.10734.3.4.3.1.7	The port number or index used as a trap parameter.
tptSmsQuarantineEndpointUser	1.3.6.1.4.1.10734.3.4.3.1.8	A string that identifies the quarantined endpoint user.
tptSmsQuarantineNotifyActionList	1.3.6.1.4.1.10734.3.4.3.1.9	A string that identifies the matching policy.
tptSmsQuarantineNotifyParamList	1.3.6.1.4.1.10734.3.4.3.1.10	A string that identifies the matching policy.
tptSmsQuarantineNotifyOptionList	1.3.6.1.4.1.10734.3.4.3.1.11	A string that identifies the matching policy.
tptSmsQuarantinePolicyName	1.3.6.1.4.1.10734.3.4.3.1.12	The name of an SMS quarantine policy.
tptSmsRepDvVersion	1.3.6.1.4.1.10734.3.4.3.1.13	The Reputation DV version.
tptSmsMessage	1.3.6.1.4.1.10734.3.4.3.1.14	A generic message parameter.
tptSmsQuarantineDataGroup	1.3.6.1.4.1.10734.3.4.1.1.1	Payload of SMS quarantine traps consisting of a unique identifier and a parseable string.
tptSmsQuarantineNotifyGroup	1.3.6.1.4.1.10734.3.4.1.1.2	SMS quarantine traps sent to an NMS to indicate devices that require a quarantine operation.
tptSmsQuarantineNotifyAckGroup	1.3.6.1.4.1.10734.3.4.1.1.3	SMS quarantine traps sent to an SMS system to indicate devices that have been quarantined.

OBJECT	OID	DESCRIPTION
tptSmsQuarantineRequestGroup	1.3.6.1.4.1.10734.3.4.1.1.4	SMS quarantine traps received to indicate devices that require a (un)quarantine operation.

TPT-TPA-HARDWARE-MIB

Describes the device hardware and its components, including ports, chassis, fans, and power supplies.

The following table describes the hardware objects:

OBJECT	OID	DESCRIPTION
hw-numFans	1.3.6.1.4.1.10734.3.3.2.3.7	Number of fan subunits on the device
hw-numPowerSupplies	1.3.6.1.4.1.10734.3.3.2.3.8	Number of power supply subunits on the device
hw-numPEMs	1.3.6.1.4.1.10734.3.3.2.3.9	Number of power entry module subunits on the device
hw-certificateNumber	1.3.6.1.4.1.10734.3.3.2.3.10	Hardware certificate number of the device
hw-serialNumber	1.3.6.1.4.1.10734.3.3.2.3.11	Hardware serial number of the device

Fans

The following table provides information about the fan hardware objects:

OBJECT	OID	DESCRIPTION
hw-fanTable	1.3.6.1.4.1.10734.3.3.2.3.3	Table of fan data for the device. Represented as a table with one row.
hw-fanEntry	1.3.6.1.4.1.10734.3.3.2.3.3.1	An entry in the fan table.

OBJECT	OID	DESCRIPTION
fanSubunit	1.3.6.1.4.1.10734.3.3.2.3.3.1.1	The number for this entry in the fan table. The controller is always 0 (zero).
fanType	1.3.6.1.4.1.10734.3.3.2.3.3.1.3	Type of hardware element: <ul style="list-style-type: none">• 0: unequipped• 19: fan controller• 20: fan subunit
fanCfgType	1.3.6.1.4.1.10734.3.3.2.3.3.1.4	Fan configuration: <ul style="list-style-type: none">• 0: unconfigured• 1: simplex• 2: duplex• 3: load share• 4: autonomous
fanRunState	1.3.6.1.4.1.10734.3.3.2.3.3.1.5	High-level hardware state of the fan: <ul style="list-style-type: none">• 0: out of service• 1: initializing• 2: active• 3: standby• 4: diagnostic• 5: loopback• 6: active-FAF• 7: standby-FAF• 8: active - degraded• 9: standby - degraded

OBJECT	OID	DESCRIPTION
fanQualifier1	1.3.6.1.4.1.10734.3.3.2.3.3.1.6	Further qualification/detail on the high-level hardware state: <ul style="list-style-type: none"> • 1: degraded • 13: yellow alarm • 14: red alarm
fanQualifier2	1.3.6.1.4.1.10734.3.3.2.3.3.1.7	Further qualification/detail on the high-level hardware state: <ul style="list-style-type: none"> • 1: degraded • 13: yellow alarm • 14: red alarm
fanQualifier3	1.3.6.1.4.1.10734.3.3.2.3.3.1.8	Further qualification/detail on the high-level hardware state: <ul style="list-style-type: none"> • 1: degraded • 13: yellow alarm • 14: red alarm
fanQualifier4	1.3.6.1.4.1.10734.3.3.2.3.3.1.9	Further qualification/detail on the high-level hardware state: <ul style="list-style-type: none"> • 1: degraded • 13: yellow alarm • 14: red alarm
fanStartTime	1.3.6.1.4.1.10734.3.3.2.3.3.1.10	Time at which the fan was powered up
fanVendorID	1.3.6.1.4.1.10734.3.3.2.3.3.1.11	Identifying number of the fan vendor
fanDeviceID	1.3.6.1.4.1.10734.3.3.2.3.3.1.12	An identifying number specific to the fan
fanProductID	1.3.6.1.4.1.10734.3.3.2.3.3.1.13	Versions and other inventory information

OBJECT	OID	DESCRIPTION
fanFPGAVersion	1.3.6.1.4.1.10734.3.3.2.3.1.14	Version of the TippingPoint FPGA chip on the fan

For fan health, see [Fans on page 1-13](#).

Power supply

The following table provides information about the power supply hardware objects:

OBJECT	OID	DESCRIPTION
hw-psTable	1.3.6.1.4.1.10734.3.3.2.3.4	Table of power supply data for the device. Represented as a table with one row.
hw-psEntry	1.3.6.1.4.1.10734.3.3.2.3.4.1	Entry in the power supply table
psSubunit	1.3.6.1.4.1.10734.3.3.2.3.4.1.1	The number for this entry in the power supply table. This number is always 0 (zero).
psType	1.3.6.1.4.1.10734.3.3.2.3.4.1.3	Type of hardware element: <ul style="list-style-type: none"> • 0: unequipped • 17: power supply • 18: power supply sub-unit
psCfgType	1.3.6.1.4.1.10734.3.3.2.3.4.1.4	Power supply configuration: <ul style="list-style-type: none"> • 0: unconfigured • 1: simplex • 2: duplex • 3: load share • 4: autonomous

OBJECT	OID	DESCRIPTION
psRunState	1.3.6.1.4.1.10734.3.3.2.3.4.1.5	High-level hardware state of the power supply: <ul style="list-style-type: none"> • 0: out of service • 1: initializing • 2: active • 3: standby • 4: diagnostic • 5: loopback • 6: active-FAF • 7: standby-FAF • 8: active - degraded • 9: standby - degraded
psQualifier1	1.3.6.1.4.1.10734.3.3.2.3.4.1.6	Further qualification/detail on the high-level hardware state. <ul style="list-style-type: none"> • 1: degraded • 13: yellow alarm • 14: red alarm
psQualifier2	1.3.6.1.4.1.10734.3.3.2.3.4.1.7	Further qualification/detail on the high-level hardware state. <ul style="list-style-type: none"> • 1: degraded • 13: yellow alarm • 14: red alarm
psQualifier3	1.3.6.1.4.1.10734.3.3.2.3.4.1.8	Further qualification/detail on the high-level hardware state. <ul style="list-style-type: none"> • 1: degraded • 13: yellow alarm • 14: red alarm

OBJECT	OID	DESCRIPTION
psQualifier4	1.3.6.1.4.1.10734.3.3.2.3.4.1.9	Further qualification/detail on the high-level hardware state. <ul style="list-style-type: none"> • 1: degraded • 13: yellow alarm • 14: red alarm
psStartTime	1.3.6.1.4.1.10734.3.3.2.3.4.1.10	Time at which the power supply was powered up
psVendorID	1.3.6.1.4.1.10734.3.3.2.3.4.1.11	Identifying number of the power supply vendor
psDeviceID	1.3.6.1.4.1.10734.3.3.2.3.4.1.12	Identifying number specific to the power supply
psProductID	1.3.6.1.4.1.10734.3.3.2.3.4.1.13	Versions and other inventory information
psFPGAVersion	1.3.6.1.4.1.10734.3.3.2.3.4.1.14	Version of the TippingPoint FPGA chip on the power supply

TPT-TRAFFIC

The TPT-TRAFFIC MIB defines traffic rate-limiting information.



Note

The MIB file includes traffic threshold information.

Rate limiter

The following objects provide rate-limit statistics.

OBJECT	OID	DESCRIPTION
rateLimitTable	1.3.6.1.4.1.10734.3.3.2.8.1	A table providing data about a rate-limit action set.

OBJECT	OID	DESCRIPTION
rateLimitEntry	1.3.6.1.4.1.10734.3.3.2.8.1.1	An entry in the rate-limit table. Rows cannot be added or deleted.
rateLimitGlobalID	1.3.6.1.4.1.10734.3.3.2.8.1.1.1	The global ID of a rate-limit action set.
rateLimitRequestedRate	1.3.6.1.4.1.10734.3.3.2.8.1.1.2	The bit rate in Kbps defined by the action set creator.
rateLimitActualRate	1.3.6.1.4.1.10734.3.3.2.8.1.1.3	The bit rate in Kbps defined at the hardware level.
rateLimitPacketsSent	1.3.6.1.4.1.10734.3.3.2.8.1.1.4	The number of packets sent via this action set since the table was last cleared.
rateLimitPacketsDropped	1.3.6.1.4.1.10734.3.3.2.8.1.1.5	The number of packets dropped by this action set since the table was last cleared.
rateLimitPacketsQueued	1.3.6.1.4.1.10734.3.3.2.8.1.1.6	The number of packets queued and ready to be sent via this action set.
rateLimitHistNumSeconds	1.3.6.1.4.1.10734.3.3.2.8.1.1.7	The number of seconds of valid historical sample data available.
rateLimitHistNumMinutes	1.3.6.1.4.1.10734.3.3.2.8.1.1.8	The number of minutes of valid historical sample data available.
rateLimitHistNumHours	1.3.6.1.4.1.10734.3.3.2.8.1.1.9	The number of hours of valid historical sample data available.

Rate limit historical seconds

The following objects provide rate-limit statistics as recorded every second for a minute.

OBJECT	OID	DESCRIPTION
rateLimitHistSecondsTable	1.3.6.1.4.1.10734.3.3.2.8.2	Historical sample data as recorded every second for a minute.
rateLimitHistSecondsEntry	1.3.6.1.4.1.10734.3.3.2.8.2.1	An entry in the rate-limit history seconds table.
rateLimitHistSecondsGlobalID	1.3.6.1.4.1.10734.3.3.2.8.2.1.1	The global ID of a rate-limit action set.
rateLimitHistSecondsIndex	1.3.6.1.4.1.10734.3.3.2.8.2.1.2	The index (0–59) of a second.
rateLimitHistSecondsBytesSent	1.3.6.1.4.1.10734.3.3.2.8.2.1.3	The number of bytes sent in the specified second.
rateLimitHistSecondsTimestamp	1.3.6.1.4.1.10734.3.3.2.8.2.1.4	The time that this statistic was updated, measured in seconds since January 1, 1970.

Rate limit historical minutes

The following objects provide rate-limit statistics as recorded every minute for an hour.

OBJECT	OID	DESCRIPTION
rateLimitHistMinutesTable	1.3.6.1.4.1.10734.3.3.2.8.3	Historical sample data as recorded every minute for an hour.
rateLimitHistMinutesEntry	1.3.6.1.4.1.10734.3.3.2.8.3.1	An entry in the rate-limit history minutes table.
rateLimitHistMinutesGlobalID	1.3.6.1.4.1.10734.3.3.2.8.3.1.1	The global ID of a rate-limit action set.
rateLimitHistMinutesIndex	1.3.6.1.4.1.10734.3.3.2.8.3.1.2	The index (0–59) of a minute.
rateLimitHistMinutesBytesSent	1.3.6.1.4.1.10734.3.3.2.8.3.1.3	The number of bytes sent in the specified minute.

OBJECT	OID	DESCRIPTION
rateLimitHistMinutesTimestamp	1.3.6.1.4.1.10734.3.3.2.8.3.1.4	The time that this statistic was updated, measured in seconds since January 1, 1970.

Rate limit historical hours

The following objects provide rate-limit statistics as recorded every hour for a day.

OBJECT	OID	DESCRIPTION
rateLimitHistHoursTable	1.3.6.1.4.1.10734.3.3.2.8.4	Historical sample data as recorded every hour for a day.
rateLimitHistHoursEntry	1.3.6.1.4.1.10734.3.3.2.8.4.1	An entry in the rate-limit history hours table.
rateLimitHistHoursGlobalID	1.3.6.1.4.1.10734.3.3.2.8.4.1.1	The global ID of a rate limit action set.
rateLimitHistHoursIndex	1.3.6.1.4.1.10734.3.3.2.8.4.1.2	The index (0–23) of an hour.
rateLimitHistHoursBytesSent	1.3.6.1.4.1.10734.3.3.2.8.4.1.3	The number of bytes sent in the specified hour.
rateLimitHistHoursTimestamp	1.3.6.1.4.1.10734.3.3.2.8.4.1.4	The time that this statistic was updated, measured in seconds since January 1, 1970.

TPT-TPAMIBS-MIB

Describes definitions for TPT device models. This section indicates the addition of the Threat Protection System (TPS) models to the table. For registration identifiers of other TPT models, refer to the *MIBs Guide* for those products.

The following table identifies the TPS models:

OBJECT	OID	DESCRIPTION
tpt-model-440T-IPS	1.3.6.1.4.1.10734.1.3.47	Registration for the 440T Threat Protection System.
tpt-model-2200T-IPS	1.3.6.1.4.1.10734.1.3.48	Registration for the 2200T Threat Protection System.
tpt-model-VTPS-Trial-IPS	1.3.6.1.4.1.10734.1.3.49	Registration for the TippingPoint vTPS Standard Trial Threat Protection System.
tpt-model-VTPS-Standard-IPS	1.3.6.1.4.1.10734.1.3.50	Registration for the TippingPoint vTPS Standard Threat Protection System.
tpt-model-8200TX-IPS	1.3.6.1.4.1.10734.1.3.51	Registration for the 8200TX Threat Protection System.
tpt-model-8400TX-IPS	1.3.6.1.4.1.10734.1.3.52	Registration for the 8400TX Threat Protection System.
tpt-model-VTPS-CLOUD	1.3.6.1.4.1.10734.1.3.53	Registration for the TippingPoint Cloud Threat Protection System.
tpt-model-1100TX-IPS	1.3.6.1.4.1.10734.1.3.54	Registration for the TippingPoint 1100TX Threat Protection System.
tpt-model-5500TX-IPS	1.3.6.1.4.1.10734.1.3.55	Registration for the TippingPoint 5500TX Threat Protection System.
tpt-model-8600TXE-IPS	1.3.6.1.4.1.10734.1.3.58	Registration for the 8600TXE Threat Protection System.
tpt-model-9200TXE-IPS	1.3.6.1.4.1.10734.1.3.56	Registration for the TippingPoint 9200TXE Threat Protection System.

TPT-TSE

Defines TSE settings, including adaptive filtering.

Adaptive filter configuration

The following table lists the top ten filters in the Adaptive Filter Configuration list.

OBJECT	OID	DESCRIPTION
topTenAdaptFilterTable	1.3.6.1.4.1.10734.3.3.2.7.1	Adaptive filter configuration top ten list.
topTenAdaptFilterEntry	1.3.6.1.4.1.10734.3.3.2.7.1.1	An entry in the adaptive filter configuration top ten list. Rows cannot be added or deleted.
topTenAdaptFilterRank	1.3.6.1.4.1.10734.3.3.2.7.1.1.1	The numerical ranking of a filter in the adaptive filter top ten list.
adaptFilterName	1.3.6.1.4.1.10734.3.3.2.7.1.1.2	The name of the filter.
adaptFilterUUID	1.3.6.1.4.1.10734.3.3.2.7.1.1.3	The global identifier of the filter.
adaptFilterSegment	1.3.6.1.4.1.10734.3.3.2.7.1.1.4	The segment to which the filter applies.
adaptFilterEnabledState	1.3.6.1.4.1.10734.3.3.2.7.1.1.5	The state of the filter.
adaptFilterSigID	1.3.6.1.4.1.10734.3.3.2.7.1.1.7	The global identifier of a signature.
adaptFilterProfile	1.3.6.1.4.1.10734.3.3.2.7.1.1.8	The name of the profile associated with the filter.

Connection blocks table

The following table lists all connection blocks.

OBJECT	OID	DESCRIPTION
connectionBlockTable	1.3.6.1.4.1.10734.3.3.2.7.2	Table of connections that correspond to blocked streams.

OBJECT	OID	DESCRIPTION
connectionBlockEntry	1.3.6.1.4.1.10734.3.3.2.7.2.1	An entry in the connection block table. Rows cannot be added or deleted.
connectionBlockIndex	1.3.6.1.4.1.10734.3.3.2.7.2.1.1	The index number of the entry in the connection block table.
connectionBlockSrcAddr	1.3.6.1.4.1.10734.3.3.2.7.2.1.2	The source IPv4 address of a blocked connection.
connectionBlockSrcPort	1.3.6.1.4.1.10734.3.3.2.7.2.1.3	The source port of a blocked connection.
connectionBlockDestAddr	1.3.6.1.4.1.10734.3.3.2.7.2.1.4	The destination IPv4 address of a blocked connection.
connectionBlockDestPort	1.3.6.1.4.1.10734.3.3.2.7.2.1.5	The destination port of a blocked connection.
connectionBlockProtocol	1.3.6.1.4.1.10734.3.3.2.7.2.1.6	The transmission protocol of a blocked connection. <ul style="list-style-type: none"> • 1: ICMP • 2: UDP • 3: TCP • 4: other IP • 5: ARP • 6: other ETH • 7: ICMP v6 • 8: other IPV6
connectionBlockPort	1.3.6.1.4.1.10734.3.3.2.7.2.1.7	The segment on which the incoming data caused the connection to be blocked.
connectionBlockReason	1.3.6.1.4.1.10734.3.3.2.7.2.1.8	The UUID of the signature that caused the block.

OBJECT	OID	DESCRIPTION
connectionBlockSrcAddrV6	1.3.6.1.4.1.10734.3.3.2.7.2.1.9	The source IPv6 address of a blocked connection.
connectionBlockDestAddrV6	1.3.6.1.4.1.10734.3.3.2.7.2.1.10	The destination IPv6 address of a blocked connection.
connectionBlockTotalCount	1.3.6.1.4.1.10734.3.3.2.7.3	The total number of connections corresponding to blocked streams. Only the first 50 are included in the connection block table.

Rate limit streams table

The following table lists connections that have been rate-limited.

OBJECT	OID	DESCRIPTION
rateLimitStreamTable	1.3.6.1.4.1.10734.3.3.2.7.4	Table of connections that correspond to rate-limited streams.
rateLimitStreamEntry	1.3.6.1.4.1.10734.3.3.2.7.4.1	An entry in the rate-limited stream table. Rows cannot be added or deleted.
rateLimitStreamIndex	1.3.6.1.4.1.10734.3.3.2.7.4.1.1	The index number of the entry in the rate-limited stream table.
rateLimitStreamSrcAddr	1.3.6.1.4.1.10734.3.3.2.7.4.1.2	The source IPv4 address of a rate-limited stream.
rateLimitStreamSrcPort	1.3.6.1.4.1.10734.3.3.2.7.4.1.3	The source port of a rate-limited stream.
rateLimitStreamDestAddr	1.3.6.1.4.1.10734.3.3.2.7.4.1.4	The destination IPv4 address of a rate-limited stream.
rateLimitStreamDestPort	1.3.6.1.4.1.10734.3.3.2.7.4.1.5	The destination port of a rate-limited stream.

OBJECT	OID	DESCRIPTION
rateLimitStreamProtocol	1.3.6.1.4.1.10734.3.3.2.7.4.1.6	The protocol of a rate-limited stream. <ul style="list-style-type: none"> • 1: ICMP • 2: UDP • 3: TCP • 4: other IP • 5: ARP • 6: other ETH • 7: ICMP v6 • 8: other IPV6
rateLimitStreamPort	1.3.6.1.4.1.10734.3.3.2.7.4.1.7	The segment on which the incoming data caused the connection to be rate-limited.
rateLimitStreamReason	1.3.6.1.4.1.10734.3.3.2.7.4.1.8	The UUID of the signature that caused the rate-limit.
rateLimitStreamSrcAddrV6	1.3.6.1.4.1.10734.3.3.2.7.4.1.9	The source IPv6 address of a rate-limited stream.
rateLimitStreamDestAddrV6	1.3.6.1.4.1.10734.3.3.2.7.4.1.10	The destination IPv6 address of a rate-limited stream.
rateLimitStreamTotalCount	1.3.6.1.4.1.10734.3.3.2.7.5	The total number of connections corresponding to rate-limited streams. Only the first 50 are included in the rate limited stream table.

Connection trusts table

The following table lists trusted connections.

OBJECT	OID	DESCRIPTION
connectionTrustTable	1.3.6.1.4.1.10734.3.3.2.7.6.2	Table of connections that correspond to trusted streams.
connectionTrustEntry	1.3.6.1.4.1.10734.3.3.2.7.6.2.1	An entry in the connection trust table. Rows cannot be added or deleted.
connectionTrustIndex	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.1	The index number of the entry in the connection trust table.
connectionTrustSrcAddr	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.2	The source IPv4 address of a trusted connection.
connectionTrustSrcPort	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.3	The source port of a trusted connection.
connectionTrustDestAddr	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.4	The destination IPv4 address of a trusted connection.
connectionTrustDestPort	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.5	The destination port of a trusted connection.
connectionTrustProtocol	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.6	The protocol of a trusted connection. <ul style="list-style-type: none"> • 1: ICMP • 2: UDP • 3: TCP • 4: other IP • 5: ARP • 6: other ETH • 7: ICMP v6 • 8: other IPV6

OBJECT	OID	DESCRIPTION
connectionTrustPort	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.7	The segment on which the incoming data caused the connection to be trusted.
connectionTrustReason	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.8	The UUID of the signature that caused the trust.
connectionTrustSrcAddrV6	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.9	The source IPv6 address of a trusted connection.
connectionTrustDestAddrV6	1.3.6.1.4.1.10734.3.3.2.7.6.2.1.10	The destination IPv6 address of a trusted connection.
connectionTrustTotalCount	1.3.6.1.4.1.10734.3.3.2.7.6.3	The total number of connections corresponding to trusted streams. Only the first 50 are included in the connection trust table.

Chapter 2

Using HP Network Node Manager i with MIBs

HP Network Node Manager i (NNMi) is a well-known commercial network management system. Much of this information can be transposed onto other network management systems.

This topic focuses on adding enterprise MIB monitoring and reporting to NNMi. The examples in this topic were created on NNMi running on Windows XP Professional Service Pack 1.

**Note**

To perform the procedures in this topic, you must have installed NNMi. Refer to the NNMi documentation for more information about that product.

This topic includes the following:

- *Loading TippingPoint Enterprise MIBs on page 2-2*
- *MIB Application Builder on page 2-2*
- *Discovering the device on page 2-3*
- *Creating graphs with Application Builder on page 2-4*

Loading TippingPoint Enterprise MIBs

Before you begin, you must configure NNMi to understand the TippingPoint Enterprise MIBs.

1. In the NNMi Root Map, select the **Options** menu.
2. Select **Load/Unload MIBs: SNMP**.
3. Load **TIPPINGPOINT-REG-MIB**.
4. Load the remaining TPT MIBs in any order. NNMi might prompt you when loading the MIBs to add a macro definition. This is normal behavior, and you should accept the MIB.

MIB Application Builder

NNMi includes a tool called MIB Application Builder that allows you to build custom applications that retrieve data using SNMP and to retrieve any information stored in a MIB.

1. Select **Options => MIB Application Builder: SNMP**. The **MIB Application Builder: SNMP** dialog box displays.
2. Select **Edit => New item**. The application prompts you with three fields: Application ID, Application Type and Application Title.
 - Enter 111 for the **Application ID**.
 - Leave the Application Type as Form.
 - Enter an **Application Title**.
3. Select the MIB Objects that have the information that you want to view.
4. Click **Next**. The **MIB Application Builder / Add MIB Objects** screen displays.
5. In the navigation tree, locate **iso.org.dod.internet.private.enterprises**. You are now at the start of the IPS MIBs.
6. In the tree, select the variables that you want to monitor and click **Add**. Click **Close** to return to the previous screen.

7. Depending on how you added the objects, you might need to reorder them. You can reorder the variables by using the Up and Down arrows in the **New MIB Application - Display Fields** form.
8. Click **Next** to continue to the **New MIB Application - NMN Integration** dialog screen.
9. Enter `TippingPoint` after `Configuration->`. The line should appear as **Configuration->TippingPoint** under **Menu Location**. This creates a menu item under the Configuration menu on the main screen.
10. You can select an object on the map. Select **Configuration** from the menu and retrieve the information you created if the device is a TippingPoint device.
11. Close the **MIB Application Builder** dialog box.

Discovering the device

By default, NNMi automatically discovers devices as they arrive on the network. This form of discovery can be a slow process and might not display devices for days (depending on the size of your network). To expedite that process, use the `loadhosts` command.

1. Open your text editor and create a file named `hosts`.
2. In the file, enter the IP address of your device and the hostname. This format is similar to the UNIX `/etc/hosts` file format. For example, you might enter the following information:

```
192.168.65.20 nds10
```

3. Save the file and open a command shell.
4. Run the `loadhosts` command on the file. The command takes the network mask and the file as arguments. For example:

```
loadhosts -m 255.255.255.0 hosts
```

After you run the `loadhosts` command, the device is now discovered by NNMi. When you open the Internet icon on your NNMi map, a green square


displays. This icon should be your device or devices. Select this icon and choose **Configuration** from the menu bar to view the device.

NNMi has a number of built-in applications that can retrieve data from standard MIBs. For example, when you open the device configuration, all of the Ethernet interfaces associated with that device are displayed. When you right-click on the interface and choose **Interface Properties**, information for that interface is displayed.

Creating graphs with Application Builder

You can create an application to graph the data with the MIB Application Builder tool.

1. Select the Application Builder from the Options menu.
2. Open your existing applications and double-click to edit.
3. Change the **Application Type** from a **Form** to a **Graph**.
4. Set 10 as the Poll Interval and abc as the Y-axis label. You can change these settings to fit your needs.
5. To generate the graph for your device, select the IPS green square. Choose **TippingPoint** from the Configuration menu. A graph displays for the device. Allow the graph to run about 30 seconds to begin trending the data.

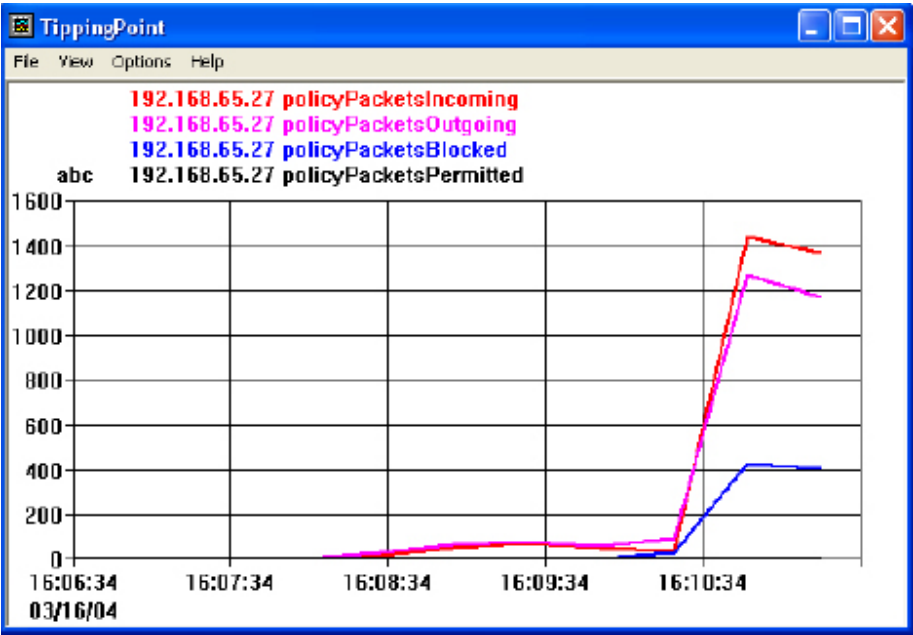



TREND MICRO INCORPORATED

225 E. John Carpenter Freeway, Suite 1500
Irving, Texas 75062 U.S.A.
Phone: +1 (817) 569-8900, Toll-free: (888) 762-8736
Email: support@trendmicro.com

www.trendmicro.com

Item Code: TPEM69851/230927